
GARLOCK METALLIC GASKET CATALOG



Garlock
SEALING TECHNOLOGIES®

Garlock Sealing Technologies

A century of excellence in fluid sealing technology



The success of nearly every manufacturing and process facility in the world depends on the reliable operation of countless pumps, valves, motors and piping systems.

Those vital pieces of equipment operate longer and more efficiently when running with Garlock Sealing Technologies gaskets, packings, hydraulic components, mechanical seals, oil seals, bearing protectors, and expansion joints.

For more than 112 years, Garlock Sealing Technologies has designed, tested and manufactured the most innovative and high quality fluid sealing products available. As a result, industrial customers around the globe have come to rely on Garlock products as a key to their profitability and success.

Garlock Metallic Gaskets, a division of Garlock Sealing Technologies, manufactures spiral wound, metal clad, solid metal and heat exchanger gaskets at its facility in Houston, Texas. This facility is registered to ISO-9001.

In recent years, Garlock Metallic Gaskets has introduced some of the industry's most innovative production methods and products. For example, CONTROLLED DENSITY® winding for spiral wound gaskets provides a high tightness level with reduced gasket stress. The TANDEM SEAL™ combines chemical resistance and fire safety in a single gasket, while the Garlock EDGE® gasket eliminates the costly and potentially catastrophic problem of radial buckling. Garlock Metallic Gaskets is also known for excellence in material and product quality as well as its outstanding customer service.

This catalog is provided for customer information and convenience. However, Garlock Metallic Gaskets applications engineers and customer service personnel are also on hand to assist you with your application requirements and technical questions. Please give us a call at 800-972-7638. We're here to serve you.



CONTROLLED DENSITY, EDGE, GRAPHONIC, FLEXSEAL and TEPHONIC are registered trademarks of Garlock Inc.

TANDEM SEAL, STABL-LOCK and G.E.T. are trademarks of Garlock Inc.

Contents

Metallic Gasket Design

Factors Affecting Gasket Performance	2
Gasket Selection Criteria	3

Spiral Wound Gaskets

Garlock CONTROLLED DENSITY® Gaskets	5
The Garlock EDGE®	6
TANDEM SEAL™	7
FLEXSEAL® Family	
RW, RWI, SW For ASME Flanges	8
MC, MCR For Boiler Manholes	9
HH For Boiler Handholes	10
RW-RJ For Ring Joint Flanges	11
LMF For Large Male/Female Flanges	12
LTG For Large Tongue and Groove Flanges	12
STG For Small Tongue and Groove Flanges	12

Engineering Data

Material Temperature Limits	13
Thickness and Tolerances	13
ASME Flange Data	
Flange Types	14
Recommended Flange Finish	15
Maximum Bore	16
Gasket Dimensions	17
Gasket Seating Requirements	
Effective Gasket Seating Width	26
Gasket Factors M and Y	27
Calculating Load Requirements	28
Torque Tables	29
Flange and Bolt Dimensions	35
Gasket Installation	36
Troubleshooting Leaking Joints	37

Metal-Clad and Heat Exchanger Gaskets

Heat Exchanger Gasket Configurations	39
GRAPHONIC® Metallic Gasket	40
Garlock Kammprofile Gasket	41
600 Series Gaskets	42

Ordering Guide

Standard Gaskets	44
Custom Gaskets	44
Application Data Form	45

Factors Affecting Gasket Performance

A gasket is any deformable material which, when clamped between essentially stationary faces, prevents the passage of media across the gasketed connection.


Compressing the gasket material causes the material to flow into the imperfections of the sealing areas and effect a seal. This bond prevents the escape of the contained media. In order to maintain this seal, sufficient load must be applied to the connection to oppose the hydrostatic end force created by the internal pressure of the system.

Gasket performance depends on a number of factors, including:

1. **Gasket Metal and Filler Material:** The materials must withstand the effects of:
 - a. **Temperature:** Temperature can adversely affect mechanical and chemical properties of the gasket, as well as physical characteristics such as oxidation and resilience.
 - b. **Pressure:** The media or internal piping pressure can blow out the gasket across the flange face.
 - c. **Media:** The gasket materials must be resistant to corrosive attack from the media.

2. **Joint Design:** The force holding the two flanges together must be sufficient to prevent flange separation caused by hydrostatic end force, resulting from the pressure in the entire system.
3. **Proper Bolt Load:** If the bolt load is insufficient to deform the gasket, or is so excessive that it crushes the gasket, a leak will occur.
4. **Surface Finish:** If the surface finish is not suitable for the gasket, a seal will not be effected.

Forces Acting on a Gasket

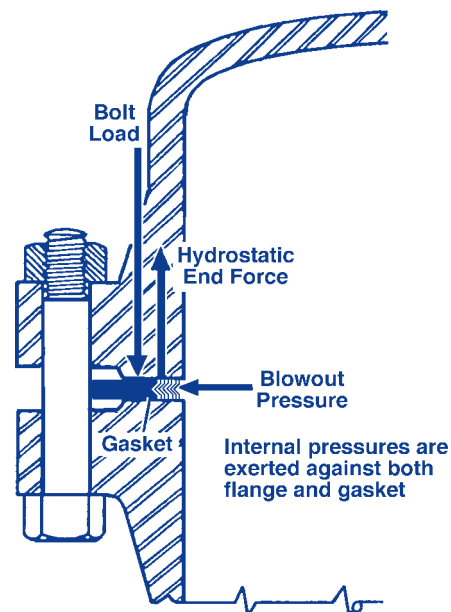

Gasket Selection

Spiral Wound Gaskets

One of the best all-around seals, the spiral wound gasket offers a low-cost solution that has the ability to handle temperature and pressure fluctuations. Multiple plies of metal and filler in the spiral create a barrier that reduces the possibility of leaks.

Heat Exchanger Gaskets

Garlock manufactures a wide variety of double-jacketed, spiral-wound, metal-clad and solid metal gaskets for heat exchanger applications. GRAPHONIC® and Kammprofile gaskets are also available in heat exchanger configurations.

Temperature and Chemical Considerations

Be certain that the gasket you order is as resistant as possible to the media and temperature involved. Check the chemical compatibility of the metal as well as the filler material for the media to be sealed. As a general rule, the metal used in either the spiral winding or double-jacketed gasket should be similar to the flange material.

The compressibility of flexible graphite makes it an excellent filler material for metallic gaskets. Flexible graphite may be used in services with temperatures up to 950°F (485°C), though it should not be used with strong oxidizers such as nitric or sulfuric acid.

PTFE filler material provides excellent chemical resistance at temperatures below 500°F (260°C). In accordance with ASME B16.20, an inner ring is required when using conventional PTFE filler materials, in order to protect the winding from radial buckling.

See page 13 for the temperature limits of common metals and filler materials.

Operating Pressure

Changes in spiral winding construction affects gasket density. Higher pressure applications require windings with more wraps of thinner filler material. This construction withstands higher bolt loads, and provides a better seal against high pressures. A lower pressure gasket has fewer wraps of metal and filler, allowing the gasket to seat under lower bolt loads.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Spiral Wound Gaskets

Manufactured in Accordance with ASME B16.20


Spiral wound gaskets—made with an alternating combination of formed metal wire and soft filler materials—form a very effective seal when compressed between two flanges. A v-shaped crown centered in the metal strip acts as a spring, giving gaskets greater resiliency under varying conditions. Filler and wire material can be changed to accommodate different chemical compatibility requirements. If the load available to compress a gasket is limited, gasket construction and dimensions can be altered to provide an effective seal.

A spiral wound gasket may include a centering ring, an inner ring or both. The outer centering ring centers the gasket within the flange and acts as a compression limiter, while the inner ring provides additional radial strength. The inner ring also reduces flange erosion and protects the sealing element.

Resiliency and strength make spiral wound gaskets an ideal choice under a variety of conditions and applications. Widely used throughout refineries and chemical processing plants, spiral wound gaskets are also effective for power generation, aerospace, and a variety of valve and specialty applications.

The spiral wound gasket industry is currently adapting to a change in the specification covering spiral wound gaskets. Previously API 601, the new specification is ASME B16.20. These specifications are very similar, and Garlock follows manufacturing procedures in accordance with the guidelines set forth in the ASME B16.20 specifications.

Gasket Identification Markings Required by ASME B16.20

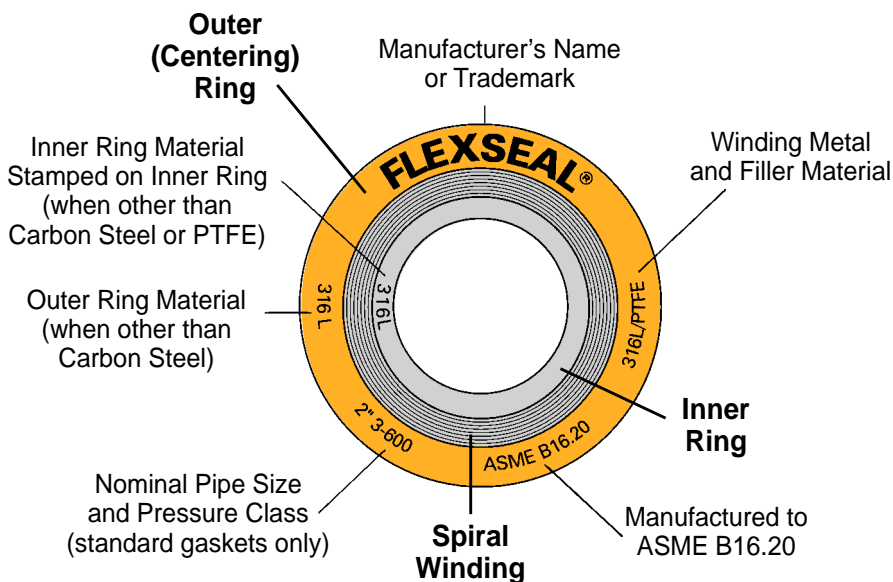

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Garlock CONTROLLED DENSITY® Gaskets


Benefits

Superior performance

- Computerized manufacturing process ensures optimum filler density is constant across gasket winding for consistent compression and superior sealability
- High tightness level achieved with minimal compressive load, for longer-lasting seal

Unequaled reliability

- All 150 and 300 lb. class flexible graphite-filled gaskets now incorporate CONTROLLED DENSITY® technology
- Tight tolerance on gasket ID and OD ensures a reliable seal

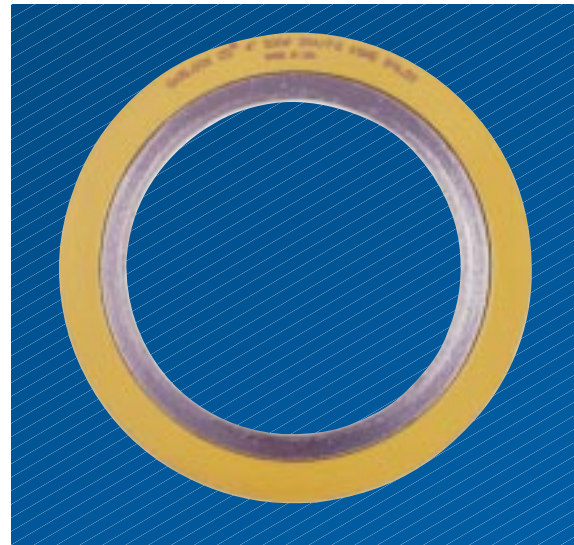

Gasket Style and Material	Gasket Factor "M"	Gasket Factor "Y" (psi)
Traditional spiral wound gasket—304 SS and flexible graphite	3.00	10,000
Garlock CONTROLLED DENSITY® spiral wound gasket	3.00	7,500

ROTT Test and Results

ROTT Test

- **Purpose:** Determine room temperature sealing capabilities, by measuring the sealability of a gasket at incremental gasket stress values
- **Sample used:** Two 304 SS and flexible graphite-filled 4" Class 150 ASME B16.20 CONTROLLED DENSITY® spiral wound gaskets
- **Procedure:** The leak rate is measured during the loading and unloading cycles, and a tightness curve is generated.*

Test Results

- When compared with other spiral wound gaskets, the CONTROLLED DENSITY® gasket was able to achieve equivalent tightness at a lower load in all tightness parameter values.
- During stress cycling, the performance of CONTROLLED DENSITY® gaskets was excellent, compared with other spiral wound gaskets.

Comparison of Seating Requirements

Gasket Material	Gasket Constant Gb (psi)	Gasket Constant 'a'	Gasket Constant Gs (psi)	Stress Req'd for Tightness of 100 (psi)	Stress Req'd for Tightness of 1000 (psi)	Stress Req'd for Tightness of 10,000 (psi)
Garlock CONTROLLED DENSITY® flexible graphite-filled spiral wound gasket (ASME B16.20)	627	0.35	6.22	3,140	7,040	11,430
Flexible graphite spiral wound gasket	2,300	0.237	13	6,851	11,823	20,405
PTFE-filled spiral wound gasket	4,500	0.14	70	8,575	11,836	16,339
Foil-reinforced flexible graphite sheet	816	0.377	0.066	4,631	11,033	26,284
Garlock GRAPHONIC® gasket	922	0.248	5.1	2,889	5,114	9,052
"Low stress" spiral wound type gasket, flexible graphite filled	598	0.385	0.03	3,520	8,540	14,570
Garlock Kammprofile gasket	368	0.4	0.28	2,324	5,838	14,664

* Gb = stress at which seal is initiated; "a" = the slope of the log/log tightness curve; Gs = intersection of the unload curve with the vertical axis (Tp1)

Note: For a 5" OD gasket at 800 psig, Tp100 = 102ml/min. leakage, Tp1,000 = 1.02ml/min. leakage, Tp10,000 = 0.01 ml/min. leakage.

The Garlock EDGE®

Benefits

No Radial Buckling

- STABL-LOCK™ inner wrap construction prevents sealing element from flowing into and contaminating process stream
- Garlock CONTROLLED DENSITY® winding prevents bolt torque loss and requires less compressive force to seal

Tightest seal

- Retaining groove grips winding firmly, maintaining symmetrical cross-section for most effective seal
- Modified guide ring ensures contact with all raised face surfaces

Multiple applications


- Dual flange (DF) design accommodates both 150 and 300 lb flanges—reduces inventory costs
- Select from a wide variety of metallic and filler materials with a full range of temperature capabilities*

* See chart on page 13.

Compare


Standard spiral wound gasket shows excessive radial buckling

The patented Garlock EDGE® spiral wound gasket is designed to eliminate radial buckling

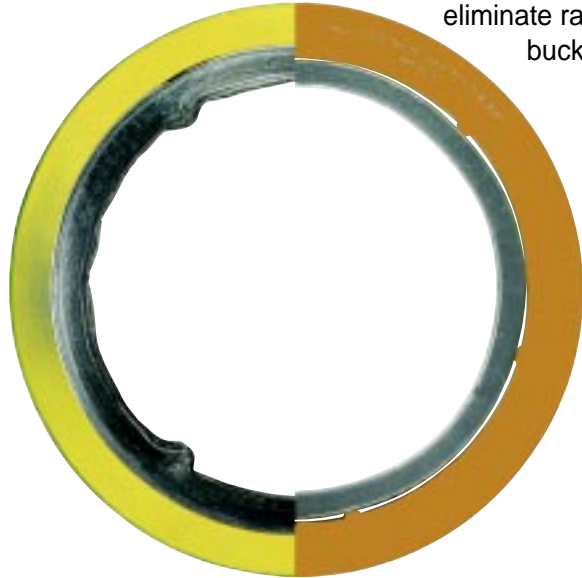

Gasket Style and Material	"M"	"Y" (psi)	Gb (psi)	"a"	Gs (psi)
Garlock EDGE® with 304 stainless and flexible graphite filler	2.00	5,000	793	0.4	0.31

Dual Flange (DF) Design

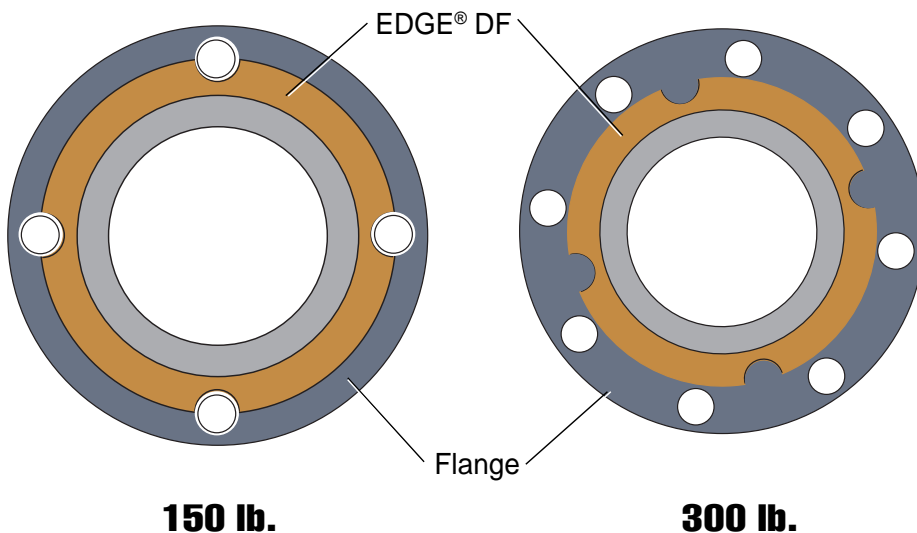

TANDEM SEAL™*

Benefits


Chemical-resistant and fire-safe

- PTFE envelope withstands aggressive chemicals and corrosive media
- Fire-safe—passed independent fire tests
- Two sealing elements significantly reduce corrosion and bacterial contamination of flanges
- Seals to the ID of the pipe bore
- Withstands high pressure


* Patent No. 5511797

Seal Comparison


Traditional Design

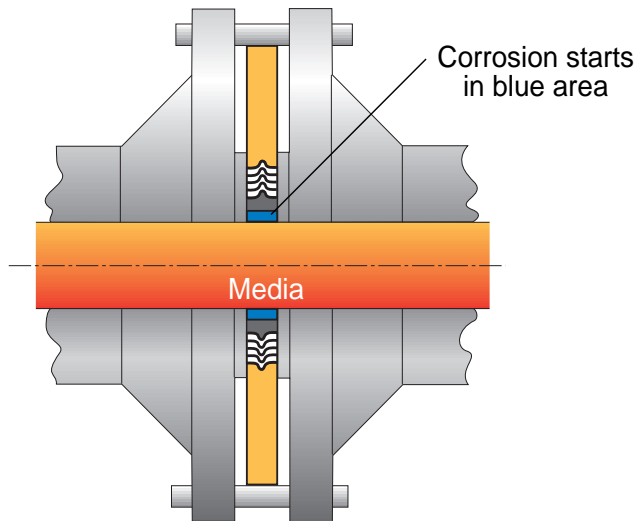

TANDEM SEAL™ Design

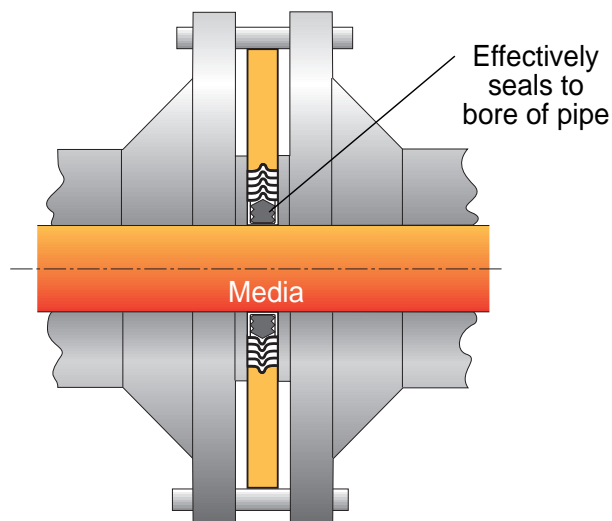

Standard Construction

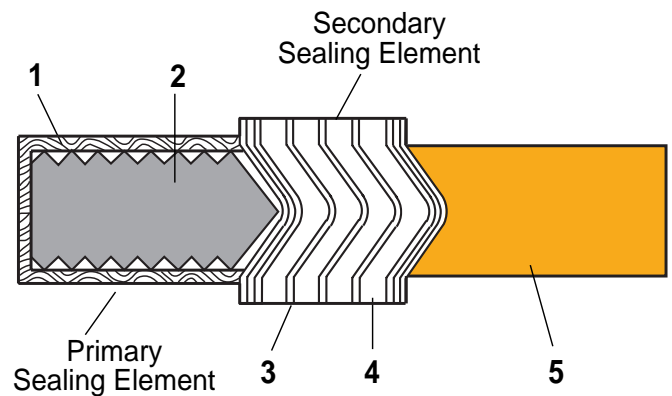

1. PTFE envelope
2. Profiled inner ring
3. Metal windings
4. Filler material
5. Outer guide ring

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

FLEXSEAL® RW, RWI and SW Gaskets

Advantages

- Durable; easy installation and removal
- Seals pressures to flange ratings, in accordance with ASME B16.5
- Suited to temperatures from cryogenic to 2000°F (1093°C)
- Guide ring simplifies centering of sealing element on the flange face
- Custom-tailored solutions accommodate a variety of conditions by combining various metals and filler materials

Style RW

- General purpose gasket suitable for flat face and raised face flanges up to Class 2500
- Centering ring accurately locates the gasket on the flange face, provides additional radial strength, and acts as a compression limiter
- Spiral winding (sealing element) consists of preformed metal and soft filler material

NOTE: An inner ring is recommended for applications above Class 600, due to the high available bolt load. See Style RWI.

Style RWI

- Suitable for flat face and raised face flanges up to Class 2500
- Recommended for higher pressure applications, for use with PTFE fillers, and when delineated by ASME B16.20
- Inner ring acts as compression limiter and protects sealing elements from process media attack

Style SW

- Suitable for tongue and groove, male-female, or groove-to-flat face flanges
- Spiral winding only, containing preformed metal and soft filler material
- Inner and outer diameters of winding are reinforced with several plies of metal without filler to give greater stability

NOTE: Also available with inner rings—Style SWI.

Ordering Information

RW/RWI



When ordering specify:

- Nominal pipe size and pressure rating
- Winding and filler materials
- Centering and/or inner compression ring material

SW

When ordering, specify:

- O.D. and I.D. dimensions (and tolerance, if other than standard—see page 13)
- Thickness of gasket
- Winding and filler material
- Inner ring material, if required (Style SWI)
- Pressure rating

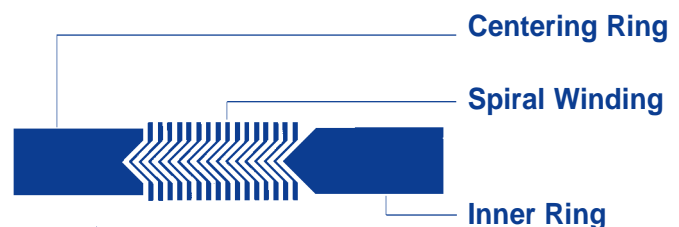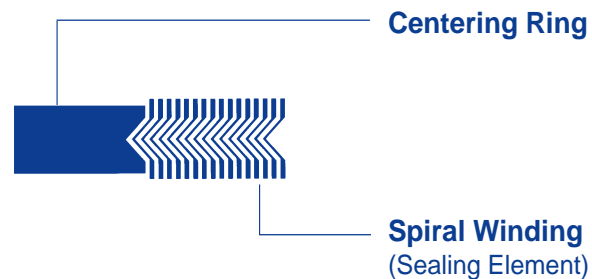


Note: For M & Y factors, see page 27.
For ROTT Test results, see page 5.

FLEXSEAL[®] MC and MCR Gaskets

For Manhole Cover Assemblies

MC Gasket (manhole cover)

- Spiral winding only, containing preformed metal and soft filler material

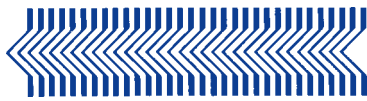

Spiral Winding
(Sealing Element)

MCR Gasket (manhole cover with centering ring)

- Centering ring accurately locates the gasket on the flange face, provides additional radial strength, and acts as a compression limiter
- Spiral winding (sealing element) consists of preformed metal and soft filler material



Centering Ring


Spiral Winding
(Sealing Element)

Ordering Information

When ordering, specify:

- Make and model of boiler and/or equipment if available (See chart page 10)
- Gasket style and configuration
- Dimensions of gasket (thickness, flange seating width, and shape)
- Maximum operating pressure and temperature
- Type of metal and filler materials

MC and MCR Configurations

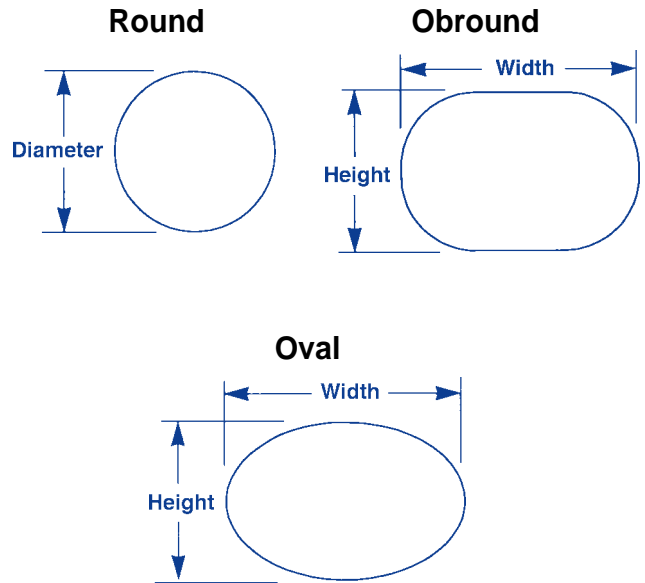

Dimensions of MC and MCR Gaskets

Style	Nominal I.D. Dimensions (Inches)	Thickness (Inches)	Flange Width (Inches)
MC Oval	11 x 15	0.175	3/4
MC Oval	11 x 15	0.175	15/16
MC Oval	11 x 15	0.175	1-1/4
MC Oval	12 x 16	0.250	15/16
MCR Oval	12 x 16	0.250	13/16
MC Oval	12 x 16	0.175	3/4
MC Oval	12 x 16	0.175	15/16
MC Oval	12 x 16	0.175	1-1/4
MC Oval	12 x 16	0.250	1-1/4
MC Round	16-1/16	0.175	3/4

NOTES:


1. For pitted and rough flange surfaces, specify a gasket thickness of 0.250".
2. Orders for special cover assemblies should be accompanied by a dimensional drawing showing the minimum width of seating surfaces and other essential dimensions.
3. Style MC oval and obround gaskets are available in 0.175" and 0.250" thickness and in varying widths as shown above.
4. Orders for non-standard gaskets should also include a sketch or drawing of the cover assembly with all dimensions shown.

FLEXSEAL® HH Gaskets

For Boiler Handhole and Tubecap Assemblies

- Fits most standard boilers (specify maximum operating pressure when ordering)
- Available in thicknesses of 0.125" (special), 0.175" (standard) and 0.250" (special—for pitted surfaces)

Style HH Configurations

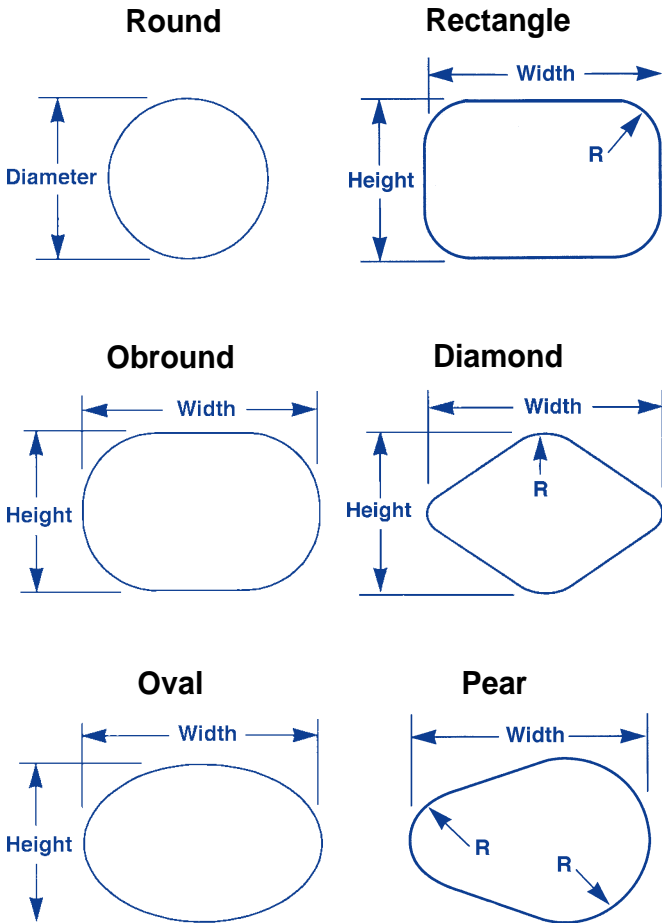

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Boiler Gasket Dimensions

Manufacturer and Model No.	Shape	Nominal I.D. Dimensions (Inches)	Flange Width (Inches)
Babcock and Wilcox #40 (207)	Diamond	3-3/8 x 3-3/4	3/16
#48 (208)	Oval	3-13/16 x 4-3/4	7/32
#24 (211)	Oval	4-1/2 x 5-1/2	7/32
#47	Round	2-1/32	3/16
#70	Round	3-9/32	3/16
#28 (212)	Rectangle	4-13/16 x 5	7/32
Badenhausen (See Riley Stoker)			
Cleaver-Brooks	Obround	3-9/32 x 4-17/32	3/8
Combustion Engr. 29N-L839	Diamond	3-3/8 x 4-1/4	1/4
4N-L740	Round	3-1/8	1/4
5N-L902	Round	3-5/8	1/4
Foster Wheeler 2 3/4 (1003)	Obround	2-25/32 x 3-13/32	7/32
3 5/16 (1005)	Oval	4-3/16 x 5-3/16	5/16
Heine	Round	3-5/8	3/8
Keeler	Obround	3 x 4	3/8
Oilfield	Oval	3 x 4	3/8
	Oval	3-1/2 x 4-1/2	3/8
Riley Stoker W-C2	Obround	3-23/32 x 5-23/32	11/32
Springfield	Oval	3-17/32 x 4-17/32	5/16
Union	Pear	4-1/4 x 5-1/4	3/8
Vogt	Oval	4-1/4 x 5-1/8	7/32 (new)
Wickes			
D2300	Pear	4-1/8 x 5-1/8	9/32
D2301	Oval	3 x 4	5/16
	Oval	3-1/2 x 4-1/2	5/16


Ordering Information

When ordering, specify:

- Make and model of boiler and/or equipment, if available
- Gasket style and configuration
- Dimensions of gasket (thickness, flange seating width, and shape)
- Maximum operating pressure and temperature
- Type of metal and filler materials

FLEXSEAL® RW-RJ Gaskets

For Replacement of Ring Joint Gaskets

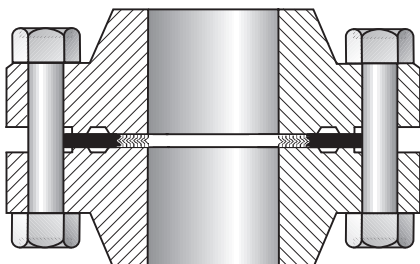

- Ideal replacement for solid metal oval or octagonal API ring joint gaskets
- Saves cost of flange replacement when gasket groove is badly worn
- Fast and easy installation—requires only a 3/16" flange separation (ring joint gasket may require as much as 3/4")
- Wide variety of metal and filler materials have a full range of temperature and pressure capabilities
- Not stocked, but can be special-ordered

Nominal Pipe Size (Inches)	150 psi			300 psi			400 psi		
	Gasket I.D.	Gasket O.D.	Ring O.D.	Gasket I.D.	Gasket O.D.	Ring O.D.	Gasket I.D.	Gasket O.D.	Ring O.D.
1/2	—	—	—	9/16	1-1/16	2-1/8	9/16	1-1/16	2-1/8
3/4	—	—	—	13/16	1-5/16	2-5/8	13/16	1-5/16	2-5/8
1	1-1/8*	1-5/8*	2-5/8*	1-1/16	1-5/8	2-7/8	1-1/16	1-5/8	2-7/8
1-1/4	1-3/8*	1-7/8*	3*	1-5/16	2	3-1/4	1-5/16	2	3-1/4
1-1/2	1-5/8*	2-1/4*	3-3/8*	1-9/16	2-3/8	3-3/4	1-9/16	2-3/8	3-3/4
2	2-1/8*	2-7/8*	4-1/8*	2-1/8	2-3/4	4-3/8	2-1/8	2-3/4	4-3/8
2-1/2	2-3/4*	3-5/16*	4-7/8*	2-3/4	3-5/16	5-1/8	2-3/4	3-5/16	5-1/8
3	3-5/16*	3-15/16*	5-3/8*	3-5/16	3-15/16	5-7/8	3-5/16	3-15/16	5-7/8
4	4-5/16*	5-3/16*	6-7/8*	4-5/16	5-3/16	7-1/8	4-5/16	5-3/16	7
5	5-5/16*	6-3/16*	7-3/4*	5-5/16	6-7/16	8-1/2	5-5/16	6-7/16	8-3/8
6	6-5/16*	7-3/16*	8-3/4*	6-7/16	7-5/8	9-7/8	6-7/16	7-5/8	9-3/4
8	8-1/4*	9-3/16*	11*	8-1/4	9-15/16	12-1/8	8-1/4	9-15/16	12
10	10-5/16*	11-7/16*	13-3/8*	10-5/16	12	14-1/4	10-5/16	12	14-1/8
12	12-3/16*	13-9/16*	16-1/8*	12-7/8†	14-1/4†	16-5/8†	12-7/8†	14-1/4†	16-1/2†
14	13-7/16*	14-15/16*	17-3/4*	14-1/4†	15-3/4†	19-1/8†	14-1/4†	15-3/4†	19†
16	15-5/16*	16-15/16*	20-1/4*	16-1/4†	17-3/4†	21-1/4†	16-1/4†	17-3/4†	21-1/8†
18	17-1/4*	19*	21-5/8*	18-1/4†	20-1/4†	23-1/2†	18-1/4†	20-1/4†	23-3/8†
20	19-1/8*	21-1/8*	23-7/8*	20-1/4†	22-3/16†	25-3/4†	20-1/4†	22-3/16†	25-1/2†
24	23*	25-1/4*	28-1/4*	24-1/4†	26-5/16†	30-1/2†	24-1/4†	26-5/16†	30-1/4†

Nominal Pipe Size (Inches)	600 psi			900 psi			1500 psi		
	Gasket I.D.	Gasket O.D.	Ring O.D.	Gasket I.D.	Gasket O.D.	Ring O.D.	Gasket I.D.	Gasket O.D.	Ring O.D.
1/2	9/16	1-1/16	2-1/8	9/16*	1-1/16*	2-1/2*	9/16*	1-1/16*	2-1/2*
3/4	13/16	1-5/16	2-5/8	13/16*	1-3/8*	2-3/4*	13/16*	1-3/8*	2-3/4*
1	1-1/16	1-5/8	2-7/8	1-1/16*	1-5/8*	3-1/8*	1-1/16*	1-5/8*	3-1/8*
1-1/4	1-5/16	2	3-1/4	1-5/16*	2*	3-1/2*	1-5/16*	2*	3-1/2*
1-1/2	1-9/16	2-3/8	3-3/4	1-9/16*	2-3/8*	3-7/8*	1-9/16*	2-3/8*	3-7/8*
2	2-1/8	2-3/4	4-3/8	2-1/4*	3-1/4*	5-5/8*	2-1/4*	3-1/4*	5-5/8*
2-1/2	2-3/4	3-5/16	5-1/8	2-9/16*	3-5/8*	6-1/2*	2-9/16*	3-5/8*	6-1/2*
3	3-5/16	3-15/16	5-7/8	3-3/16*	4-3/16*	6-5/8*	3-3/16*	4-11/16*	6-7/8*
4	4-5/16	5-3/16	7-5/8	4-1/16*	5-3/16*	8-1/8*	4-1/16*	5-11/16*	8-1/4*
5	5-5/16	6-7/16	9-1/2	5-5/16	6-7/16	9-3/4	5-1/16*	6-15/16*	10*
6	6-7/16	7-5/8	10-1/2	6-5/16	7-5/8	11-3/8	6*	7-9/16*	11-1/8*
8	8-1/4	9-15/16	12-5/8	8-1/4	9-15/16	14-1/8	7-7/8*	9-3/4*	13-7/8*
10	10-5/16	12	15-3/4	10-5/16	12	17-1/8	9-13/16*	11-7/8*	17-1/8*
12	12-7/8†	14-1/4†	18†	12-7/8	14-1/4	19-5/8	11-15/16*	13-13/16*	20-1/2*
14	14-1/4†	15-3/4†	19-3/8†	13-13/16	15-9/16	20-1/2	13-7/16	15-3/16	22-3/4
16	16-1/4†	17-3/4†	22-1/4†	15-9/16	17-9/16	22-5/8	15	17	25-1/4
18	18-1/4†	20-1/4†	23-3/8†	17-11/16	19-15/16	25-1/8	17-1/4	19-1/2	27-3/4
20	20-1/4†	22-3/16†	26-7/8†	19-11/16	21-15/16	27-1/2	19-3/16	21-7/16	29-3/4
24	24-1/4†	26-5/16†	31-1/8†	23-3/16	25-15/16	33	23	25-1/2	35-1/2

Dimensions for weld neck type flanges having a pipe bore equal to that of schedule 40 pipe and heavier, but not for slip-on flanges; except:

† Both charts: suitable for slip-on and weld neck type flanges


* Top chart: for weld neck type flanges having a pipe bore equal to that of schedule 40 pipe. Not for slip-on flanges.

* Bottom chart: for schedule 80 pipe and heavier.

FLEXSEAL® LMF, LTG and STG Gaskets

For Male-Female, Tongue and Groove Flanges

- Spiral winding of preformed metal and soft filler material—for use where no space is provided for a compression guide ring
- Inner diameter of windings is reinforced with several plies of metal without filler to give greater stability
- Style LMF — large male-female flanges
Style LTG — large tongue and groove flanges
Style STG — small tongue and groove flanges



Cross Sectional View of Winding

Ordering Information

When ordering, specify:

- Nominal pipe size
- Pressure rating
- Winding materials (304 SS is standard, filler material must be specified)
- Thickness of winding (0.125" is standard)

Style LMF Gasket Dimensions

Nominal Pipe Size (Inches)	150 - 1500 psi		Nominal Pipe Size (Inches)	2500 psi	
	I.D. (Inches)	O.D. (Inches)		I.D. (Inches)	O.D. (Inches)
1/4	1/2	1	1/2	13/16	1-3/8
1/2	1	1-3/8	3/4	1-1/16	1-11/16
3/4	1-5/16	1-11/16	1	1-1/4	2
1	1-1/2	2	1-1/4	1-5/8	2-1/2
1-1/4	1-7/8	2-1/2	1-1/2	1-7/8	2-7/8
1-1/2	2-1/8	2-7/8	2	2-3/8	3-5/8
2	2-7/8	3-5/8	2-1/2	3	4-1/8
2-1/2	3-3/8	4-1/8	3	3-3/4	5
3	4-1/4	5	3-1/2	—	—
3-1/2	4-3/4	5-1/2	4	4-3/4	6-3/16
4	5-3/16	6-3/16	5	5-3/4	7-5/16
4-1/2	5-11/16	6-3/4	6	6-3/4	8-1/2
5	6-5/16	7-5/16	8	8-3/4	10-5/8
6	7-1/2	8-1/2	10	10-3/4	12-3/4
8	9-3/8	10-5/8	12	13	15
10	11-1/4	12-3/4			
12	13-1/2	15			
14	14-3/4	16-1/4			
16	17	18-1/2			
18	19-1/4	21			
20	21	23			
24	25-1/4	27-1/4			

Style LTG Dimensions

Nominal Pipe Size (Inches)	150 - 2500 psi	
	I.D. (Inches)	O.D. (Inches)
1/2	1	1-3/8
3/4	1-5/16	1-11/16
1	1-1/2	2
1-1/4	1-7/8	2-1/2
1-1/2	1-1/8	2-7/8
2	2-7/8	3-5/8
2-1/2	3-3/8	4-1/8
3	4-1/4	5
3-1/2	4-3/4	5-1/2
4	5-3/16	6-3/16
5	6-5/16	7-5/16
6	7-1/2	8-1/2
8	9-3/8	10-5/8
10	11-1/4	12-3/4
12	13-1/2	15
14	14-3/4	16-1/4
16	17	18-1/2
18	19-1/4	21
20	21	23
24	25-1/4	27-1/4

Style STG Dimensions

Nominal Pipe Size (Inches)	150 - 2500 psi	
	I.D. (Inches)	O.D. (Inches)
1/2	1	1-3/8
3/4	1-5/16	1-11/16
1	1-1/2	1-7/8
1-1/4	1-7/8	2-1/4
1-1/2	2-1/8	2-1/2
2	2-7/8	3-1/4
2-1/2	3-3/8	3-3/4
3	4-1/4	4-5/8
3-1/2	4-3/4	5-1/8
4	5-3/16	5-11/16
5	6-5/16	6-13/16
6	7-1/2	8
8	9-3/8	10
10	11-1/4	12
12	13-1/2	14-1/4
14	14-3/4	15-1/2
16	16-3/4	17-5/8
18	19-1/4	20-1/8
20	21	22
24	25-1/4	26-1/4

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Spiral Wound Specifications

Temperature Limits for Common Metals

Material	Minimum		Maximum		Abbreviation
	°F	°C	°F	°C	
304 Stainless Steel	-320	-195	1400	760	304
316L Stainless Steel	-150	-100	1400	760	316L
317L Stainless Steel					317L
321 Stainless Steel	-320	-195	1400	760	321
347 Stainless Steel	-320	-195	1700	925	347
Carbon Steel	-40	-40	1000	540	CRS
20Cb-3 (Alloy 20)	-300	-185	1400	760	A-20
HASTELLOY® B 2	-300	-185	2000	1090	HAST B
HASTELLOY® C 276	-300	-185	2000	1090	HAST C
INCOLOY® 800	-150	-100	1600	870	IN 800
INCONEL® 600	-150	-100	2000	1090	INC 600
INCONEL® X750	-150	-100	2000	1090	INX
MONEL® 400	-200	-130	1500	820	MON
Nickel 200	-320	-195	1400	760	NI
Titanium	-320	-195	2000	1090	TI

Guide Ring Color Code*
Yellow
Green
Maroon
Turquoise
Blue
Silver
Black
Brown
Beige
White
Gold
No Color
Orange
Red
Purple

Temperature Limits for Filler Material

Material	Minimum		Maximum		Abbreviation
	°F	°C	°F	°C	
Ceramic	-350	-212	2000	1090	CER
Flexible Graphite	-350	-212	950	510	F.G.
PTFE	-400	-240	500	260	PTFE
Verdicarb (Mica Graphite)	-350	-212	550	288	VC

Stripe Color Code*
Light Green
Gray
White
Pink

HASTELLOY® is a registered trademark of Haynes International.

INCOLOY® and INCONEL® are registered trademarks of Inco Alloys International, Inc.

MONEL® is a registered trademark of International Nickel.

* ASME B 16.20 standard

Available Thicknesses

Winding	Ring(s) Inner & Outer
0.125"	3/32"
0.175"	1/8"
0.250"	3/16"
0.285"	3/16"

Tolerances

For spiral wound gaskets not otherwise specified.


Gasket		Width Limits		Compressed Thickness
Thickness	Tolerance	Minimum	Maximum	
0.125"***	±0.005"	3/16"	1"†	0.090 - 0.100"
0.175"***	±0.005"	1/4"	1-1/2"†	0.125 - 0.135"
0.250"***	±0.005"	5/16"	1-1/2"†	0.180 - 0.200"
0.285"***	±0.005"	5/16"	1-1/2"†	0.200 - 0.220"

** Measured across the metallic portion of the gasket not including the filler, which may protrude slightly.

† Spiral wound gaskets can be made to large maximum widths if required. Call Garlock for details.

Flange Types


Flat Face

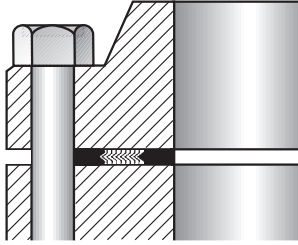

Unconfined Gasket

- Mating faces of both flanges are flat
- Gasket may be ring type, or full face, which covers the entire face both inside and outside the bolts


Raised Face

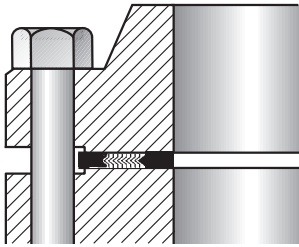

Unconfined Gasket

- Mating face is flat, but the area inside the bolt holes is raised 1/16" or 1/4"
- Gasket is usually ring type, entirely within bolts
- Flanges may be disassembled easily without springing the flange


Ring Joint

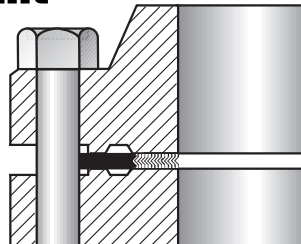

Also Called "API Joint"

- Both flange faces have matching flat-bottomed grooves with sides tapered from the vertical at 23°
- Gasket seats on flat section of flange between bore and ring joint groove
- Garlock spiral wound gaskets can replace solid metal ring gaskets


Male-Female

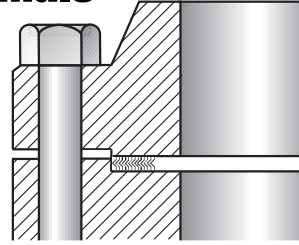

Semi-Confined Gasket

- Depth of female (recessed) face normally equal to or less than height of male (raised) face, to prevent metal-to-metal contact during gasket compression
- Recessed O.D. normally is not more than 1/16" larger than the O.D. of the male face
- Joint must be pried apart for disassembly


Tongue and Groove

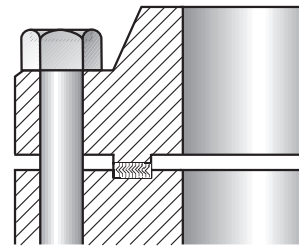

Fully Confined Gasket

- Groove depth is equal to or less than tongue height
- Groove usually not over 1/16" wider than tongue
- Gasket dimensions will match tongue dimensions
- Joint must be pried apart for disassembly

Groove to Flat

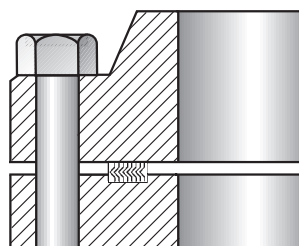

Fully Confined Gasket

- One flange face is flat, the other is recessed
- For applications requiring accurate control of gasket compression
- Only resilient gaskets are recommended—spiral wound, hollow metal O-ring, pressure-actuated, and metal-jacketed gaskets

Gasket Selection By Flange Type

	CD®/RW	EDGE®	TANDEM	RWI	SW	MC	MCR	HH	RW-RJ	LMF	LTG	STG
Flat Face	■	■	■	■		■	■	■				
Raised Face	■	■	■	■			■					
Ring Joint									■			
Male-Female					■	■				■	■	■
Tongue-&-Groove					■	■					■	■
Groove-to-Flat					■	■						

Flange Surface Finish

The surface finish of a flange is described as follows:

Roughness

- Average of peaks and valleys measured from midline of flange surface (in millionths of an inch)
- Expressed as rms (root mean square) or AA (arithmetic average) or AARH (arithmetic average roughness height)

Lay

- The direction of the predominant surface-roughness pattern
- Example: multidirectional, phonographic spiral serrations, etc.

Waviness

- The departure from overall flatness
- Measured in thousandths or fractions of an inch

Recommended Values

Spiral Wound Gaskets 125-250 rms
 Jacketed or Metal Clad Gaskets 63-80 rms
 Solid Metal Gaskets 63-80 rms

NOTE:

These values are suggested only and not mandatory; however they are based upon the best cross-section of successful design experience currently available.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Maximum Flange Bore for FLEXSEAL® Gaskets

Flange Size (NPS)	Pressure Class									
	75	150	300	400	600	900 ¹	1500 ¹	2500 ¹		
1/2"	No recommendation in 75 lb. flanges	Weld-neck only ²		No flanges. Use Class 600	Weld-neck only ²	No flanges. Use Class 1500		Weld-neck only ²		
3/4"										
1"										
1 1/4"		Slip-on ³ Weld-neck ²			Slip-on ³ Weld-neck ²					
1 1/2"										
2"		Slip-on ³ Weld-neck, any bore			Slip-on ³ Weld-neck, any bore					
2 1/2"										
3"					Slip-on, Weld-neck, any bore					
4"								Weld-neck with Standard wall bore (includes nozzle ⁴ but excludes Slip-on)		
6"										
8"					Weld-neck with Schedule 10S bore described in ASME B36.19M (includes nozzle ⁴ but excludes Slip-on)			Weld-neck w/ Schedule 60 bore		
10"								Weld-neck w/ Schedule 80 bore		
12"		Slip-on, Weld-neck, any bore								
14"										
16"					Weld-neck with Schedule 10 bore described in ASME B36.10M (excludes nozzle ⁴ and Slip-on ⁵)			Weld-neck w/ Standard wall bore (excludes nozzle and Slip-on)	No flanges	
18"										
20"										
24"							Weld-neck w/ Sched. 40 bore			

NOTES:


1. Inner rings should be used for Class 900 gaskets, NPS 24; Class 1500 gaskets, NPS 12 thru NPS 24; and Class 2500 gaskets, NPS 4 thru 12 (see ASME B16.5, 3.2.5). These inner rings may extend into the pipe bore a maximum of 0.06" (1.5 mm) under the worst combination or maximum bore, eccentric installation, and additive tolerances. Purchaser should specify inner ring material.
2. In these sizes the gasket is suitable for a weld-neck flange with a standard wall bore, if the gasket and the flange are assembled concentrically. This also applies to a nozzle. It is the user's responsibility to determine if the gasket is satisfactory for the flange of any larger bore.
3. Gaskets in these sizes are suitable for slip-on flanges only if the gaskets and flanges are assembled concentrically.
4. A nozzle is a long welded neck; the bore equals the flange NPS.
5. An NPS 24 gasket is suitable for nozzles.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury. Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing. While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Styles RW, RWI Dimensions 1/4" to 24" Flanges

ASME B16.20 Gaskets for ASME B16.5 Flanges


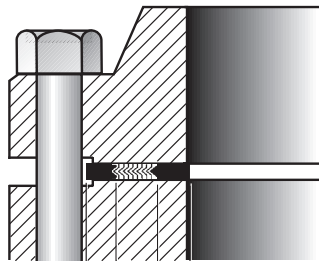


← A Inner Ring I.D.
← B Sealing Element I.D.
← C Sealing Element O.D.
← D Centering (Outer) Ring O.D.

Class 150

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/4*	—	0.50	0.88	1.75
1/2	0.56	0.75	1.25	1.88
3/4	0.81	1.00	1.56	2.25
1	1.06	1.25	1.88	2.63
1-1/4	1.50	1.88	2.38	3.00
1-1/2	1.75	2.13	2.75	3.38
2	2.19	2.75	3.38	4.13
2-1/2	2.62	3.25	3.88	4.88
3	3.19	4.00	4.75	5.38
3-1/2*	—	4.50	5.25	6.38
4	4.19	5.00	5.88	6.88
4-1/2*	—	5.50	6.50	7.00
5	5.19	6.13	7.00	7.75
6	6.19	7.19	8.25	8.75
8	8.50	9.19	10.38	11.00
10	10.56	11.31	12.50	13.38
12	12.50	13.38	14.75	16.13
14	13.75	14.63	16.00	17.75
16	15.75	16.63	18.25	20.25
18	17.69	18.69	20.75	21.63
20	19.69	20.69	22.75	23.88
24	23.75	24.75	27.00	28.25

* ASME B16.20 does not include dimensions for NPS 1/4, 3-1/2 or 4-1/2, or Class 400 flanges up to NPS 3 and Class 900 flanges up to NPS 2-1/2. Dimensions in inches.

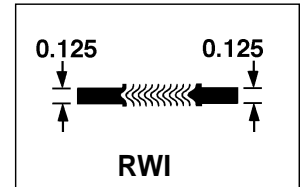

Class 300

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/4*	—	0.50	0.88	1.75
1/2	0.56	0.75	1.25	2.13
3/4	0.81	1.00	1.56	2.63
1	1.06	1.25	1.88	2.88
1-1/4	1.50	1.88	2.38	3.25
1-1/2	1.75	2.13	2.75	3.75
2	2.19	2.75	3.38	4.38
2-1/2	2.62	3.25	3.88	5.13
3	3.19	4.00	4.75	5.88
3-1/2*	—	4.50	5.25	6.50
4	4.19	5.00	5.88	7.13
4-1/2*	—	5.50	6.50	7.75
5	5.19	6.13	7.00	8.50
6	6.19	7.19	8.25	9.88
8	8.50	9.19	10.38	12.13
10	10.56	11.31	12.50	14.25
12	12.50	13.38	14.75	16.63
14	13.75	14.63	16.00	19.13
16	15.75	16.63	18.25	21.25
18	17.69	18.69	20.75	23.50
20	19.69	20.69	22.75	25.75
24	23.75	24.75	27.00	30.50

Notes:

1. The inner ring thickness shall be 0.117-0.131 inches.
2. For sizes NPS 1-1/4 thru NPS 3, the inside diameter tolerance is ± 0.03 inches; for larger sizes, the inside diameter tolerance is ± 0.06 inches.
3. There are no Class 400 flanges NPS 1/2 thru NPS 3 (use Class 600), Class 900 flanges NPS 1/2 thru NPS 2-1/2 (use Class 1500), or Class 2500 flanges NPS 14 or larger.
4. The inner ring inside diameters shown for NPS 1-1/4 thru 2-1/2 in Class 1500 and 2500 will produce inner ring widths of 0.12 inches, a practical minimum for production purposes.
5. Inner rings are required for Class 900, NPS 24 gaskets, Class 1500 NPS 12 thru NPS 24 gaskets, and Class 2500 NPS 4 thru NPS 12 gaskets.

Styles RW, RWI Dimensions 1/4" to 24" Flanges

Class 400

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/4*	—	0.50	0.88	1.75
1/2*	—	0.75	1.25	2.13
3/4*	—	1.00	1.56	2.63
1*	—	1.25	1.88	2.88
1-1/4*	—	1.88	2.38	3.25
1-1/2*	—	2.13	2.75	3.75
2*	—	2.75	3.38	4.38
2-1/2*	—	3.25	3.88	5.13
3*	—	4.00	4.75	5.88
3-1/2*	—	4.13	5.25	6.38
4	4.04	4.75	5.88	7.00
4-1/2*	—	5.31	6.50	7.63
5	5.05	5.81	7.00	8.38
6	6.10	6.88	8.25	9.75
8	8.10	8.88	10.38	12.00
10	10.05	10.81	12.50	14.13
12	12.10	12.88	14.75	16.50
14	13.50	14.25	16.00	19.00
16	15.35	16.25	18.25	21.13
18	17.25	18.50	20.75	23.38
20	19.25	20.50	22.75	25.50
24	23.25	24.75	27.00	30.25

Class 600

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/4*	—	0.50	0.88	1.75
1/2	0.56	0.75	1.25	2.13
3/4	0.81	1.00	1.56	2.63
1	1.06	1.25	1.88	2.88
1-1/4	1.50	1.88	2.38	3.25
1-1/2	1.75	2.13	2.75	3.75
2	2.19	2.75	3.38	4.38
2-1/2	2.62	3.25	3.88	5.13
3	3.19	4.00	4.75	5.88
3-1/2*	—	4.13	5.25	6.38
4	4.04	4.75	5.88	7.63
4-1/2*	—	5.31	6.50	8.25
5	5.05	5.81	7.00	9.50
6	6.10	6.88	8.25	10.50
8	8.10	8.88	10.38	12.63
10	10.05	10.81	12.50	15.75
12	12.10	12.88	14.75	18.00
14	13.50	14.25	16.00	19.38
16	15.35	16.25	18.25	22.25
18	17.25	18.50	20.75	24.13
20	19.25	20.50	22.75	26.88
24	23.25	24.75	27.00	31.13

Class 900

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/2*	—	0.75	1.25	2.50
3/4*	—	1.00	1.56	2.75
1*	—	1.25	1.88	3.13
1-1/4*	—	1.56	2.38	3.50
1-1/2*	—	1.88	2.75	3.88
2*	—	2.31	3.38	5.63
2-1/2*	—	2.75	3.88	6.50
3	3.10	3.75	4.75	6.63
3-1/2*	—	4.13	5.25	7.50
4	4.04	4.75	5.88	8.13
4-1/2*	—	5.31	6.50	9.38
5	5.05	5.81	7.00	9.75
6	6.10	6.88	8.25	11.38
8	7.75	8.75	10.13	14.13
10	9.69	10.88	12.25	17.13
12	11.50	12.75	14.50	19.63
14	12.63	14.00	15.75	20.50
16	14.75	16.25	18.00	22.63
18	16.75	18.25	20.50	25.13
20	19.00	20.50	22.50	27.50
24	23.25 (5)	24.75	26.75	33.00

* ASME B16.20 does not include dimensions for NPS 1/4, 3-1/2 or 4-1/2, or Class 400 flanges up to NPS 3 and Class 900 flanges up to NPS 2-1/2. Dimensions in inches.

Notes:

1. The inner ring thickness shall be 0.117-0.131 inches.
2. For sizes NPS 1-1/4 thru NPS 3, the inside diameter tolerance is ± 0.03 inches; for larger sizes, the inside diameter tolerance is ± 0.06 inches.
3. There are no Class 400 flanges NPS 1/2 thru NPS 3 (use Class 600), Class 900 flanges NPS 1/2 thru NPS 2-1/2 (use Class 1500), or Class 2500 flanges NPS 14 or larger.
4. The inner ring inside diameters shown for NPS 1-1/4 thru 2-1/2 in Class 1500 and 2500 will produce inner ring widths of 0.12 inches, a practical minimum for production purposes.
5. Inner rings are required for Class 900, NPS 24 gaskets, Class 1500 NPS 12 thru NPS 24 gaskets, and Class 2500 NPS 4 thru NPS 12 gaskets.

Styles RW, RWI Dimensions 1/4" to 24" Flanges

ASME B16.20 Gaskets for ASME B16.5 Flanges

Class 1500

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/2	0.56	0.75	1.25	2.50
3/4	0.81	1.00	1.56	2.75
1	1.06	1.25	1.88	3.13
1-1/4	1.31 (4)	1.56	2.38	3.50
1-1/2	1.63 (4)	1.88	2.75	3.88
2	2.06 (4)	2.31	3.38	5.63
2-1/2	2.50 (4)	2.75	3.88	6.50
3	3.10	3.63	4.75	6.88
3-1/2*	—	4.13	5.25	7.38
4	3.85	4.63	5.88	8.25
4-1/2*	—	5.31	6.50	9.13
5	4.90	5.63	7.00	10.00
6	5.80	6.75	8.25	11.13
8	7.75	8.50	10.13	13.88
10	9.69	10.50	12.25	17.13
12	11.50 (5)	12.75	14.50	20.50
14	12.63 (5)	14.25	15.75	22.75
16	14.50 (5)	16.00	18.00	25.25
18	16.75 (5)	18.25	20.50	27.75
20	18.75 (5)	20.25	22.50	29.75
24	22.75 (5)	24.25	26.75	35.50

Class 2500

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
1/2	0.56	0.75	1.25	2.75
3/4	0.81	1.00	1.56	3.00
1	1.06	1.25	1.88	3.38
1-1/4	1.31 (4)	1.56	2.38	4.13
1-1/2	1.63 (4)	1.88	2.75	4.63
2	2.06 (4)	2.31	3.38	5.75
2-1/2	2.50 (4)	2.75	3.88	6.63
3	3.10	3.63	4.75	7.75
4	3.85 (5)	4.63	5.88	9.25
5	4.90 (5)	5.63	7.00	11.00
6	5.80 (5)	6.75	8.25	12.50
8	7.75 (5)	8.50	10.13	15.25
10	9.69 (5)	10.63	12.25	18.75
12	11.50 (5)	12.50	14.50	21.63

* ASME B16.20 does not include dimensions for NPS 1/4, 3-1/2 or 4-1/2, or Class 400 flanges up to NPS 3 and Class 900 flanges up to NPS 2-1/2. Dimensions in inches.

Notes:

1. The inner ring thickness shall be 0.117-0.131 inches.
2. For sizes NPS 1-1/4 thru NPS 3, the inside diameter tolerance is ± 0.03 inches; for larger sizes, the inside diameter tolerance is ± 0.06 inches.
3. There are no Class 400 flanges NPS 1/2 thru NPS 3 (use Class 600), Class 900 flanges NPS 1/2 thru NPS 2-1/2 (use Class 1500), or Class 2500 flanges NPS 14 or larger.
4. The inner ring inside diameters shown for NPS 1-1/4 thru 2-1/2 in Class 1500 and 2500 will produce inner ring widths of 0.12 inches, a practical minimum for production purposes.
5. Inner rings are required for Class 900, NPS 24 gaskets, Class 1500 NPS 12 thru NPS 24 gaskets, and Class 2500 NPS 4 thru NPS 12 gaskets.

WARNING:


Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Styles RW, RWI Dimensions 22-60" Series A Flanges

ASME B16.20 Gaskets for ASME B16.47 Series A Flanges (MSS SP-44)

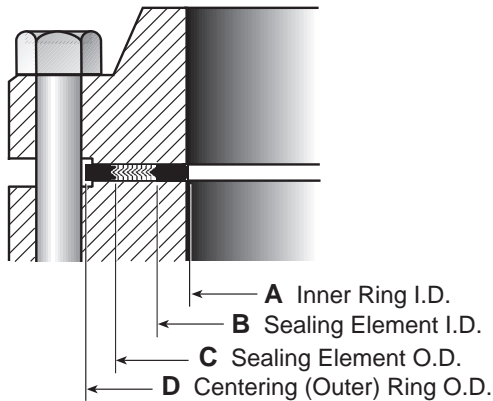

Class 150

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
22*	—	22.75	24.00	26.00
26	25.75	26.50	27.75	30.50
28	27.75	28.50	29.75	32.75
30	29.75	30.50	31.75	34.75
32	31.75	32.50	33.88	37.00
34	33.75	34.50	35.88	39.00
36	35.75	36.50	38.13	41.25
38	37.75	38.50	40.13	43.75
40	39.75	40.50	42.13	45.75
42	41.75	42.50	44.25	48.00
44	43.75	44.50	46.38	50.25
46	45.75	46.50	48.38	52.25
48	47.75	48.50	50.38	54.50
50	49.75	50.50	52.50	56.50
52	51.75	52.50	54.50	58.75
54	53.50	54.50	56.50	61.00
56	55.50	56.50	58.50	63.25
58	57.50	58.50	60.50	65.50
60	59.50	60.50	62.50	67.50

Class 300

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
22*	—	22.75	24.75	27.75
26	25.75	27.00	29.00	32.88
28	27.75	29.00	31.00	35.38
30	29.75	31.25	33.25	37.50
32	31.75	33.50	35.50	39.63
34	33.75	35.50	37.50	41.63
36	35.75	37.63	39.63	44.00
38	37.50	38.50	40.00	41.50
40	39.50	40.25	42.13	43.88
42	41.50	42.25	44.13	45.88
44	43.50	44.50	46.50	48.00
46	45.38	46.38	48.38	50.13
48	47.63	48.63	50.63	52.13
50	49.00	51.00	53.00	54.25
52	52.00	53.00	55.00	56.25
54	53.25	55.25	57.25	58.75
56	55.25	57.25	59.25	60.75
58	57.00	59.50	61.50	62.75
60	60.00	61.50	63.50	64.75

Class 400

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
22*	—	22.75	24.75	27.63
26	26.00	27.00	29.00	32.75
28	28.00	29.00	31.00	35.13
30	29.75	31.25	33.25	37.25
32	32.00	33.50	35.50	39.50
34	34.00	35.50	37.50	41.50
36	36.13	37.63	39.63	44.00
38	37.50	38.25	40.25	42.25
40	39.38	40.38	42.38	44.38
42	41.38	42.38	44.38	46.38
44	43.50	44.50	46.50	48.50
46	46.00	47.00	49.00	50.75
48	47.50	49.00	51.00	53.00
50	49.50	51.00	53.00	55.25
52	51.50	53.00	55.00	57.25
54	53.25	55.25	57.25	59.75
56	55.25	57.25	59.25	61.75
58	57.25	59.25	61.25	63.75
60	59.75	61.75	63.75	66.25

Notes:

1. There are no Class 900 flanges in NPS 50 and larger.
 2. Inner rings are required for Class 900 gaskets, NPS 26 thru NPS 48, and PTFE.
 3. The gasket inside-outside tolerance for NPS 26 thru NPS 34 is $\pm 0.03"$ and the tolerance for NPS 36 thru NPS 60 is $\pm 0.06"$.
 4. The gasket outside diameter tolerance for NPS 26 thru NPS 60 is $\pm 0.06"$.
 5. The outer ring outside diameter tolerance is $\pm 0.03"$.
 6. The gasket thickness tolerance is $\pm 0.005"$.
- * Non-ASME sizes

Styles RW, RWI Dimensions 22-60" Series A Flanges

ASME B16.20 Gaskets for ASME B16.47 Series A Flanges (MSS SP-44)

Class 600

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
22*	—	22.75	24.75	28.88
26	25.50	27.00	29.00	34.13
28	27.50	29.00	31.00	36.00
30	29.75	31.25	33.25	38.25
32	32.00	33.50	35.50	40.25
34	34.00	35.50	37.50	42.25
36	36.13	37.63	39.63	44.50
38	37.50	39.00	41.00	43.50
40	39.75	41.25	43.25	45.50
42	42.00	43.50	45.50	48.00
44	43.75	45.75	47.75	50.00
46	45.75	47.75	49.75	52.25
48	48.00	50.00	52.00	54.75
50	50.00	52.00	54.00	57.00
52	52.00	54.00	56.00	59.00
54	54.25	56.25	58.25	61.25
56	56.25	58.25	60.25	63.50
58	58.00	60.50	62.50	65.50
60	60.25	62.75	64.75	68.25

Class 900

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
22*	—	24.25	27.00	33.00
26	26.00	27.00	29.00	34.75 ⁽¹⁾
28	28.00	29.00	31.00	37.25 ⁽¹⁾
30	30.25	31.25	33.25	39.75 ⁽¹⁾
32	32.00	33.50	35.50	42.25 ⁽¹⁾
34	34.00	35.50	37.50	44.75 ⁽¹⁾
36	36.25	37.75	39.75	47.25 ⁽¹⁾
38	39.75	40.75	42.75	47.25 ⁽¹⁾
40	41.75	43.25	45.25	49.25 ⁽¹⁾
42	43.75	45.25	47.25	51.25 ⁽¹⁾
44	45.50	47.50	49.50	53.88 ⁽¹⁾
46	48.00	50.00	52.00	56.50 ⁽¹⁾
48	50.00	52.00	54.00	58.50 ⁽¹⁾

Notes:

1. Inner rings are required for Class 900 gaskets, NPS 26 thru NPS 48, and PTFE.
2. There are no Class 900 flanges in NPS 50 and larger.
3. The gasket inside-outside tolerance for NPS 26 thru NPS 34 is ± 0.03 " and the tolerance for NPS 36 thru NPS 60 is ± 0.06 ".
4. The gasket outside diameter tolerance for NPS 26 thru NPS 60 is ± 0.06 ".
5. The outer ring outside diameter tolerance is ± 0.03 ".
6. The gasket thickness tolerance is ± 0.005 ".

* Non-ASME sizes

WARNING:


Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Styles RW, RWI Dimensions 26-60" Series B Flanges

ASME B16.20 Gaskets for ASME B16.47 Series B Flanges (API-605)

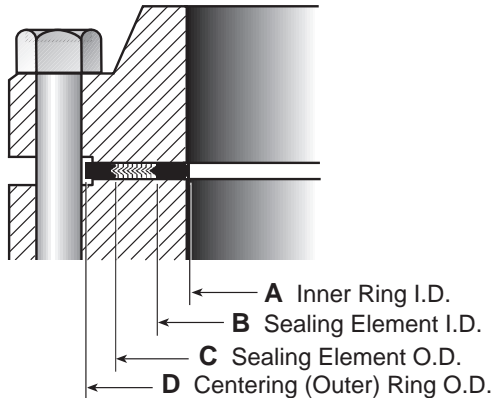

Notes:

1. Inner rings are required for Class 900 gaskets, NPS 26 thru NPS 48, and PTFE.
2. There are no Class 900 flanges in NPS 50 and larger.
3. The gasket inside-outside tolerance for NPS 26 thru NPS 34 is $\pm 0.03"$ and the tolerance for NPS 36 thru NPS 60 is $\pm 0.06"$.
4. The gasket outside diameter tolerance for NPS 26 thru NPS 60 is $\pm 0.06"$.
5. The outer ring outside diameter tolerance is $\pm 0.03"$.
6. The gasket thickness tolerance is $\pm 0.005"$.

Class 75 Large Diameter Weld Neck Flanges

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	26.25	27.00	27.88
28	28.25	29.13	29.88
30	30.25	31.13	31.88
32	32.25	33.13	33.88
34	34.25	35.13	35.88
36	36.25	37.25	38.31
38	38.25	39.31	40.31
40	40.25	41.31	42.31
42	42.25	43.25	44.31
44	44.25	45.50	46.50
46	46.25	47.50	48.50
48	48.38	49.50	50.50
50	50.25	51.50	52.50
52	52.38	53.63	54.63
54	54.38	55.63	56.63
56	56.50	57.88	58.88
58	58.50	59.88	60.88
60	60.50	61.75	62.88

Class 150

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	25.75	26.50	27.50	28.56
28	27.75	28.50	29.50	30.56
30	29.75	30.50	31.50	32.56
32	31.75	32.50	33.50	34.69
34	33.75	34.50	35.75	36.81
36	35.75	36.50	37.75	38.88
38	37.75	38.37	39.75	41.13
40	39.75	40.25	41.88	43.13
42	41.75	42.50	43.88	45.13
44	43.75	44.25	45.88	47.13
46	45.75	46.50	48.19	49.44
48	47.75	48.50	50.00	51.44
50	49.75	50.50	52.19	53.44
52	51.75	52.50	54.19	55.44
54	53.75	54.50	56.00	57.63
56	56.00	56.88	58.18	59.63
58	58.19	59.07	60.19	62.19
60	60.44	61.31	62.44	64.19

Class 300

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	25.75	26.50	28.00	30.38
28	27.75	28.50	30.00	32.50
30	29.75	30.50	32.00	34.88
32	31.75	32.50	34.00	37.00
34	33.75	34.50	36.00	39.13
36	35.75	36.50	38.00	41.25
38	38.25	39.75	41.25	43.25
40	40.25	41.75	43.25	45.25
42	42.75	43.75	45.25	47.25
44	44.25	45.75	47.25	49.25
46	46.38	47.88	49.38	51.88
48	48.50	49.75	51.63	53.88
50	49.88	51.88	53.38	55.88
52	51.88	53.88	55.38	57.88
54	53.75	55.25	57.25	60.25
56	56.25	58.25	60.00	62.75
58	58.44	60.44	61.94	65.19
60	61.31	62.56	64.19	67.19

Styles RW, RWI Dimensions 26-60" Series B Flanges

ASME B16.20 Gaskets for ASME B16.47 Series B Flanges (API-605)

Class 400

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	25.75	26.25	27.50	29.38
28	27.63	28.13	29.50	31.50
30	29.63	30.13	31.75	33.75
32	31.50	32.00	33.88	35.88
34	33.50	34.13	35.88	37.88
36	35.38	36.13	38.00	40.25
38	37.50	38.25	40.25	42.25
40	39.38	40.38	42.38	44.38
42	41.38	42.38	44.38	46.38
44	43.50	44.50	46.50	48.50
46	46.00	47.00	49.00	50.75
48	47.50	49.00	51.00	53.00
50	49.50	51.00	53.00	55.25
52	51.50	53.00	55.00	57.25
54	53.25	55.25	57.25	59.75
56	55.25	57.25	59.25	61.75
58	57.25	59.25	61.25	63.75
60	59.75	61.75	63.75	66.25

Class 600

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	25.38	26.13	28.13	30.13
28	27.25	27.75	29.75	32.25
30	29.63	30.63	32.63	34.63
32	31.25	32.75	34.75	36.75
34	33.50	35.00	37.00	39.25
36	35.50	37.00	39.00	41.25
38	37.50	39.00	41.00	43.50
40	39.75	41.25	43.25	45.50
42	42.00	43.50	45.50	48.00
44	43.75	45.75	47.75	50.00
46	45.75	47.75	49.75	52.25
48	48.00	50.00	52.00	54.75
50	50.00	52.00	54.00	57.00
52	52.00	54.00	56.00	59.00
54	54.25	56.25	58.25	61.25
56	56.25	58.25	60.25	63.50
58	58.00	60.50	62.50	65.50
60	60.25	62.75	64.75	68.25

Class 900

Size NPS	Inner Ring	Sealing Element		Outer Ring
	Inside (A) Diameter	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	26.25 ⁽¹⁾	27.25	29.50	33.00
28	28.25 ⁽¹⁾	29.25	31.50	35.50
30	30.75 ⁽¹⁾	31.75	33.75	37.75
32	33.00 ⁽¹⁾	34.00	36.00	40.00
34	35.25 ⁽¹⁾	36.25	38.25	42.25
36	36.25 ⁽¹⁾	37.25	39.25	44.25
38	39.75 ⁽¹⁾	40.75	42.75	47.25
40	41.75 ⁽¹⁾	43.25	45.25	49.25
42	43.75 ⁽¹⁾	45.25	47.25	51.25
44	45.50 ⁽¹⁾	47.50	49.50	53.88
46	48.00 ⁽¹⁾	50.00	52.00	56.50
48	50.00 ⁽¹⁾	52.00	54.00	58.50

Notes:

1. Inner rings are required for Class 900 gaskets, NPS 26 thru NPS 48, and PTFE.
2. There are no Class 900 flanges in NPS 50 and larger.
3. The gasket inside-outside tolerance for NPS 26 thru NPS 34 is ± 0.03 " and the tolerance for NPS 36 thru NPS 60 is ± 0.06 ".
4. The gasket outside diameter tolerance for NPS 26 thru NPS 60 is ± 0.06 ".
5. The outer ring outside diameter tolerance is ± 0.03 ".
6. The gasket thickness tolerance is ± 0.005 ".


WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Style RW Dimensions Other Large Diameter Flanges, 26-96"

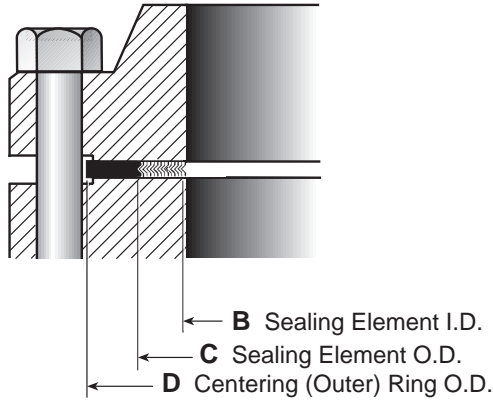

Class 75 Slip-On and Blind

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	27.00	28.25	30.13
28	29.00	30.25	32.13
30	31.00	32.25	34.13
32	33.13	34.38	36.38
34	35.13	36.50	38.38
36	37.13	38.50	40.38
42	43.25	44.75	46.63
48	49.25	50.88	52.63
54	55.38	57.75	59.13
60	61.38	63.38	65.13
66	67.50	69.50	71.75
72	73.50	75.50	77.75

Class 75 Weld Neck and Blind

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	26.50	27.75	28.75
28	28.50	29.75	30.75
30	30.50	31.75	32.75
32	32.50	33.75	35.13
34	34.50	35.88	37.13
36	36.50	37.88	39.13
42	42.50	44.00	45.63
48	48.50	50.13	51.63
54	54.50	56.38	57.88
60	60.50	62.50	63.88
66	66.50	68.50	70.25
72	72.50	74.50	76.25

Class 125

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
22	22.75	24.00	26.00
26	26.50	27.75	30.50
28	28.50	29.75	32.75
30	30.50	31.75	34.75
32	32.50	33.88	37.00
34	34.50	35.88	39.00
36	36.50	38.13	41.25
38	38.50	40.13	43.75
40	40.50	42.13	45.75
42	42.50	44.25	48.00
44	44.50	46.38	50.25
46	46.50	48.38	52.25
48	48.50	50.38	54.50
50	50.50	52.50	56.50
52	52.50	54.50	58.75
54	54.50	56.50	61.00
60	60.50	62.50	67.50
66	71.00	72.75	74.25
72	77.50	79.25	80.75
84	90.25	92.00	93.50
96	103.00	104.75	106.25

Style RW Dimensions Other Large Diameter Flanges, 26-96"

Class 175

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	26.50	27.75	29.13
28	28.50	29.75	31.13
30	30.50	31.75	33.38
32	32.50	33.75	35.38
34	34.50	35.88	37.50
36	36.50	37.88	39.50
38	38.50	39.88	41.50
40	40.50	42.00	43.50
42	42.50	44.00	45.88
44	44.50	46.00	47.88
46	46.50	48.00	49.88
48	48.50	50.13	51.88
50	50.50	52.25	53.88
52	52.50	54.38	56.13
54	54.50	56.75	58.13
60	60.50	62.50	64.13
66	67.88	68.88	70.13
72	73.38	75.13	76.63
84	87.00	88.75	90.25
96	99.00	100.75	102.25

Class 250

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	26.50	27.75	32.75
28	28.50	29.75	35.25
30	30.50	31.75	37.50
32	32.50	33.88	39.75
34	34.50	35.88	41.75
36	36.50	38.13	44.00
38	38.50	40.13	46.00
40	40.50	42.13	48.25
42	42.50	44.25	50.75
44	44.50	46.38	53.00
46	46.50	48.38	55.25
48	48.50	50.38	58.75

Class 350

Size NPS	Sealing Element		Outer Ring
	Inside (B) Diameter	Outside (C) Diameter	Outside (D) Diameter
26	26.50	27.75	29.63
28	28.50	29.75	31.63
30	30.50	31.75	33.88
32	32.50	33.88	35.88
34	34.50	35.88	37.88
36	36.50	38.13	40.38
38	38.50	40.13	42.38
40	40.50	42.13	44.38
42	42.50	44.25	46.63
44	44.50	46.38	49.00
46	46.50	48.38	51.00
48	48.50	50.38	53.00
52	52.50	54.50	57.38
54	54.50	56.50	59.38
60	60.50	62.50	65.38
66	66.50	68.50	72.50
72	72.25	77.00	78.50
84	88.38	90.13	91.63
96	100.75	102.50	104.00










WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Effective Gasket Seating Width

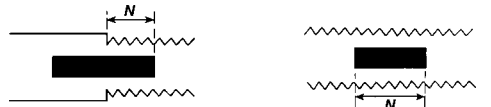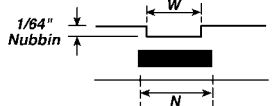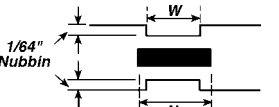Flange and Gasket Diagram	Basic Gasket Seating Width, B_0	
	Column 1 (Solid flat metal and ring joint gaskets)	Column 2 (Spiral wound, metal jacketed, corrugated metal, grooved metal gaskets)
1a 	$\frac{N}{2}$	$\frac{N}{2}$
1b* 		
1c  $W \leq N$	$\frac{W+T}{2}, \left[\frac{W+N}{4} \text{ max.} \right]$	$\frac{W+T}{2}, \left[\frac{W+N}{4} \text{ max.} \right]$
1d*  $W \leq N$		
2  $W \leq \frac{N}{2}$	$\frac{W+N}{4}$	$\frac{W+3N}{8}$
3  $W \leq \frac{N}{2}$	$\frac{N}{4}$	$\frac{3N}{8}$
4* 	$\frac{3N}{8}$	$\frac{7N}{16}$
5* 	$\frac{N}{4}$	$\frac{3N}{8}$
6 	$\frac{W}{8}$	

N = Width of gasket

W = Width of contact area
(raised face or serrations)

T = Thickness of gasket

B_0 = Basic seating width of gasket

B_1 = Effective seating width of gasket

$$B_1 = B_0 \text{ if } B_0 \leq 1/4";$$


$$B_1 = (\sqrt{B_0})/2 \text{ if } B_0 > 1/4"$$

* Where serrations do not exceed 1/64" depth and 1/32" spacing, choose 1b or 1d.


H_G = Gasket load reaction force

G = Diameter of gasket load reaction force

h_G = Distance from G to bolt circle diameter



For $B_0 > 1/4"$



For $B_0 \leq 1/4"$

Gasket Factors "M" and "Y"

"M" and "Y" data are to be used for flange designs only as specified in the ASME Boiler and Pressure Vessel Code Division 1, Section VIII, Appendix 2. They are not meant to be used as gasket seating stress values in actual service. Our bolt torque tables give that information and should be used as such.

"M" - Maintenance Factor

A factor that provides the additional preload needed in the flange fasteners to maintain the compressive load on a gasket after internal pressure is applied to a joint.

$$M = (W - A_2P) / A_1P$$

Where: W = Total Fastener force (lb. or N)

A₂ = Inside area of gasket (in.² or mm²)










P = Test pressure (psig or N/mm²)

A₁ = Gasket area (in.² or mm²)

"Y" - Minimum Design Seating Stress

The minimum compressive stress in pounds per square inch (or bar) on the contact area of the gasket that is required to provide a seal at an internal pressure of 2 psig (0.14 bar).

$$Y = W / A_1$$

Gasket Design	Gasket Material	Gasket Factor "M"	Min. Design Seating Stress "Y" (psi)
Spiral wound metal, non-asbestos filled 	Stainless steel or MONEL®	3.00	10,000
Garlock CONTROLLED DENSITY® flexible graphite-filled spiral wound 	Stainless steel or MONEL®	3.00	7,500
Garlock EDGE® 	Stainless steel or MONEL®	2.00	5,000
Corrugated metal, non-asbestos or Corrugated metal-jacketed, non-asbestos filled 	Soft aluminum	2.50	2,900
	Soft copper or brass	2.75	3,700
	Iron or soft steel	3.00	4,500
	MONEL® or 4%-6% chrome	3.25	5,500
	Stainless steel	3.50	6,500
Corrugated metal 	Soft aluminum	2.75	3,700
	Soft copper or brass	3.00	4,500
	Iron or soft steel	3.25	5,500
	MONEL® or 4%-6% chrome	3.50	6,500
	Stainless steel	3.75	7,600
Flat metal-jacketed, non-asbestos filled 	Soft aluminum	3.25	5,500
	Soft copper or brass	3.50	6,500
	Iron or soft steel	3.75	7,600
	MONEL®	3.50	8,000
	4%-6% chrome	3.75	9,000
Grooved metal 	Soft aluminum	3.25	5,500
	Soft copper or brass	3.50	6,500
	Iron or soft steel	3.75	7,600
	MONEL® or 4%-6% chrome	3.75	9,000
	Stainless steel	4.25	10,100
Solid flat metal 	Soft aluminum	4.00	8,800
	Soft copper or brass	4.75	13,000
	Iron or soft steel	5.50	18,000
	MONEL® or 4%-6% chrome	6.00	21,800
	Stainless steel	6.50	26,000
Ring joint 	Iron or soft steel	5.50	18,000
	MONEL® or 4%-6% chrome	6.00	21,800
	Stainless steel	6.50	26,000

This table lists many commonly used gasket materials and contact facings with suggested design values of "M" and "Y" that generally have proven satisfactory in actual service when using effective gasket seating width B₁ described in the formula on page 26. The design values and other details given in this table are suggested only and are not mandatory.

MONEL® is a registered trademark of International Nickel.

Calculating Load Requirements

Two formulas that define the minimum load required to effect a seal on a particular gasket are Wm1 and Wm2. When these formulas have been calculated, the larger load of the two is the load necessary to effect a seal.

Let:

$$\pi = 3.14$$

P = Maximum internal pressure

M = Gasket factor "M" defined on page 27.
(M = 3 for spiral wound gaskets)

Y = Seating stress "Y" defined on page 27.
(Y = 10,000 psi for spiral wound gaskets)

N = Basic width of a gasket per chart on page 26.
(For raised face flanges see diagram 1a)

B₀ = Basic seating width of a gasket per chart on page 26. (For raised face flanges, B₀ = N/2)

B₁ = Effective seating width of a gasket; must be determined.

ID = Inside diameter of gasket

OD = Outside diameter of gasket
For gaskets where the raised face is smaller than the OD of the gasket face, the OD is equal to the outer diameter of the raised face.

Find:

$$ID = \underline{\hspace{2cm}}$$

$$OD = \underline{\hspace{2cm}}$$

Given the ID and OD, find the value of N. Then define B₀ in terms of N (See page 26):

$$N = \underline{\hspace{2cm}}$$

$$B_0 = \underline{\hspace{2cm}}$$

Determine if B₀ is greater or less than 1/4", then find B₁:

If B₀ ≤ 1/4", then B₁ = B₀;

If B₀ > 1/4", then B₁ = (√ B₀)/2

$$B_1 = \underline{\hspace{2cm}}$$

Using B₁, determine G:

$$G = OD - [(B_1)(2)]$$

Now, insert these values in the final equations to determine minimum required load:

$$Wm1 = [\pi (P)(G^2)/4] + [2(B_1)(\pi)(G)(M)(P)]$$

$$Wm2 = \pi (B_1)(G)(Y)$$

When Wm1 and Wm2 have been calculated, the larger of the two numbers is the minimum load required to seat a gasket. In most cases the available bolt load in a connection is greater than the minimum load on the gasket. If not, higher bolt stresses or changes in the gasket design are required for an effective seal.

NOTE:

Flange design code suggestions for low pressure applications calling for minimum seating stress (Y value) are sometimes inadequate to seat the gasket because the bolting and flange rigidity are insufficient to effect a proper seal. Care should be taken to ensure that flange conditions provide a suitable seating surface. For internal pressures to be contained, flange rotation and sufficient residual loads must also be considered in the flange design.

Torque Tables

These tables were developed to be used with Garlock spiral wound gaskets. They are to be used only as a general guide. They should not be considered to contain absolute values due to the large number of uncontrollable variables involved with bolted joints. If there is doubt as to the proper torque value to use, we suggest that the maximum value be used.

All bolt torque values are based upon the use of new nuts (ASTM A194, GR 2H) and new bolts (ASTM A193, GR B7) of proper design, acceptable quality and approved materials of construction as well as metallurgy. It is also required that two hardened steel washers be used under the head of each nut and that a non-metallic based lubricant (i.e. oil and graphite) be used on the nuts, bolts and washers.

The flanges are assumed to be in good condition and in compliance with ASME B16.5 specifications. Special attention should be given to seating surface finish and flatness.

Only torque wrenches that have been calibrated should be used. The proper bolt tightening pattern must be followed (see installation section on page 36 for proper bolting pattern) with the desired ultimate torque value arrived at in a minimum of three equal increments. All bolts in the flange should then be checked in consecutive order in a counterclockwise direction.

The contact dimensions listed are taken from the ID and OD of the windings, which are different from the ASME ring gasket dimensions.

No provisions have been made in these tables to account for vibration effects on the bolts. These tables are based on ambient conditions, without compensation for elevated temperatures. If conditions different from these exist, we suggest that further analysis be performed to determine the appropriate torque values.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Torque Tables

For Spiral Wound Gaskets, ASME B16.5

Class 150

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Avail. (psi)	Prefer'd Torque (ft lb)
0.5	0.75	1.25	0.79	4	0.5	60	7560	38503	10000	16	30000	47
0.75	1	1.56	1.13	4	0.5	60	7560	26712	10000	22	26712	60
1	1.25	1.88	1.53	4	0.5	60	7560	19713	10000	30	19713	60
1.25	1.88	2.38	1.67	4	0.5	60	7560	18119	10000	33	18119	60
1.5	2.13	2.75	2.39	4	0.5	60	7560	12637	10000	47	12637	60
2	2.75	3.38	3.01	4	0.63	120	12120	16125	10000	74	16125	120
2.5	3.25	3.88	3.50	4	0.63	120	12120	13861	10000	87	13861	120
3	4	4.75	5.15	4	0.63	120	12120	9406	9406	120	9406	120
4	5	5.88	7.47	8	0.63	120	12120	12974	10000	92	12974	120
5	6.13	7	9.02	8	0.75	200	18120	16071	10000	124	16071	200
6	7.19	8.25	12.88	8	0.75	200	18120	11253	10000	178	11253	200
8	9.19	10.38	18.25	8	0.75	200	18120	7945	7945	200	7945	200
10	11.31	12.5	22.21	12	0.88	320	25140	13584	10000	236	13584	320
12	13.38	14.75	30.37	12	0.88	320	25140	9933	9933	320	9933	320
14	14.63	16	33.07	12	1	490	33060	11995	10000	408	11995	490
16	16.63	18.25	44.51	16	1	490	33060	11884	10000	412	11884	490
18	18.69	20.75	63.88	16	1.13	710	43680	10940	10000	649	10940	710
20	20.69	22.75	70.36	20	1.13	710	43680	12415	10000	572	12415	710
24	24.75	27	91.45	20	1.25	1000	55740	12190	10000	820	12190	1000

Class 300

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Avail. (psi)	Prefer'd Torque (ft lb)
0.5	0.75	1.25	0.79	4	0.5	60	7560	38522	10000	16	30000	47
0.75	1	1.56	1.13	4	0.63	120	12120	43079	10000	28	30000	84
1	1.25	1.88	1.55	4	0.63	120	12120	31319	10000	38	30000	115
1.25	1.88	2.38	1.67	4	0.63	120	12120	28994	10000	41	28994	120
1.5	2.13	2.75	2.38	4	0.75	200	18120	30517	10000	66	30000	197
2	2.75	3.38	3.03	8	0.63	120	12120	31983	10000	38	30000	113
2.5	3.25	3.88	3.53	8	0.75	200	18120	41110	10000	49	30000	146
3	4	4.75	5.15	8	0.75	200	18120	28139	10000	71	28139	200
4	5	5.88	7.52	8	0.75	200	18120	19287	10000	104	19287	200
5	6.13	7	8.97	8	0.75	200	18120	16166	10000	124	16166	200
6	7.19	8.25	12.85	12	0.75	200	18120	16925	10000	118	16925	200
8	9.19	10.38	18.28	12	0.88	320	25140	16502	10000	194	16502	320
10	11.31	12.5	22.24	16	1	490	33060	23782	10000	206	23782	490
12	13.38	14.75	30.25	16	1.13	710	43680	23102	10000	307	23102	710
14	14.63	16	32.94	20	1.13	710	43680	26520	10000	268	26520	710
16	16.63	18.25	44.36	20	1.25	1000	55740	25133	10000	398	25133	1000
18	18.69	20.75	63.78	24	1.25	1000	55740	20975	10000	477	20975	1000
20	20.69	22.75	70.25	24	1.25	1000	55740	19044	10000	525	19044	1000
24	24.75	27	91.40	24	1.5	1600	84300	22135	10000	723	22135	1600

Tables are based on the use of bolts with a yield strength of 100,000 psi.

Torque Tables

For Spiral Wound Gaskets, ASME B16.5

Class 400

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Recomm. Avail. (psi)	Prefer'd Torque (ft lb)
4	4.75	5.88	9.43	8	0.88	320	25140	21329	10000	150	21329	320
5	5.81	7	11.97	8	0.88	320	25140	16807	10000	190	16807	320
6	6.88	8.25	16.27	12	0.88	320	25140	18540	10000	173	18540	320
8	8.88	10.38	22.68	12	1	490	33060	17493	10000	280	17493	490
10	10.81	12.5	30.92	16	1.13	710	43680	22600	10000	314	22600	710
12	12.88	14.75	40.56	16	1.25	1000	55740	21988	10000	455	21988	1000
14	14.25	16	41.56	20	1.25	1000	55740	26826	10000	373	26826	1000
16	16.25	18.25	54.17	20	1.38	1360	69300	25588	10000	531	25588	1360
18	18.5	20.75	69.33	24	1.38	1360	69300	23991	10000	567	23991	1360
20	20.5	22.75	76.39	24	1.5	1600	84300	26485	10000	604	26485	1600
24	24.75	27	91.40	24	1.75	3000	118800	31194	10000	962	30000	2885

Class 600

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Recomm. Avail. (psi)	Prefer'd Torque (ft lb)
0.5	0.75	1.25	0.79	4	0.5	60	7560	38522	10000	16	30000	47
0.75	1	1.56	1.13	4	0.63	120	12120	43079	10000	28	30000	84
1	1.25	1.88	1.55	4	0.63	120	12120	31319	10000	38	30000	115
1.25	1.88	2.38	1.67	4	0.63	120	12120	28994	10000	41	28994	120
1.5	2.13	2.75	2.38	4	0.75	200	18120	30517	10000	66	30000	197
2	2.75	3.38	3.03	8	0.63	120	12120	31983	10000	38	30000	113
2.5	3.25	3.88	3.53	8	0.75	200	18120	41110	10000	49	30000	146
3	4	4.75	5.15	8	0.75	200	18120	28139	10000	71	28139	200
4	4.75	5.88	9.43	8	0.88	320	25140	21329	10000	150	21329	320
5	5.81	7	11.97	8	1	490	33060	22102	10000	222	22102	490
6	6.88	8.25	16.27	12	1	490	33060	24381	10000	201	24381	490
8	8.88	10.38	22.68	12	1.13	710	43680	23112	10000	307	23112	710
10	10.81	12.5	30.92	16	1.25	1000	55740	28840	10000	347	28840	1000
12	12.88	14.75	40.56	20	1.25	1000	55740	27486	10000	364	27486	1000
14	14.25	16	41.56	20	1.38	1360	69300	33353	10000	408	30000	1223
16	16.25	18.25	54.17	20	1.5	1600	84300	31127	10000	514	30000	1542
18	18.5	20.75	69.33	20	1.63	2200	100800	29080	10000	757	29080	2200
20	20.5	22.75	76.39	24	1.63	2200	100800	31669	10000	695	30000	2084
24	24.75	27	91.40	24	1.88	4000	138240	36298	10000	1102	30000	3306

Tables are based on the use of bolts with a yield strength of 100,000 psi.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Torque Tables

For Spiral Wound Gaskets, ASME B16.5

Class 900

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Recomm. Avail. (psi)	Prefer'd Torque (ft lb)
3	3.75	4.75	6.67	8	0.88	320	25140	30142	10000	106	30000	318
4	4.75	5.88	9.43	8	1.13	710	43680	37059	10000	192	30000	575
5	5.81	7	11.97	8	1.25	1000	55740	37264	10000	268	30000	805
6	6.88	8.25	16.27	12	1.13	710	43680	32213	10000	220	30000	661
8	8.75	10.13	20.45	12	1.38	1360	69300	40660	10000	334	30000	1003
10	10.88	12.25	24.88	16	1.38	1360	69300	44575	10000	305	30000	915
12	12.75	14.5	37.43	20	1.38	1360	69300	37024	10000	367	30000	1102
14	14	15.75	40.87	20	1.5	1600	84300	41254	10000	388	30000	1164
16	16.25	18	47.05	20	1.63	2200	100800	42847	10000	513	30000	1540
18	18.25	20.5	68.44	20	1.88	4000	138240	40396	10000	990	30000	2971
20	20.5	22.5	67.51	20	2	4400	159120	47140	10000	933	30000	2800
24	24.75	26.75	80.86	20	2.5	8800	257520	63699	10000	1381	30000	4144

Class 1500

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Recomm. Avail. (psi)	Prefer'd Torque (ft lb)
0.5	0.75	1.25	0.79	4	0.75	200	18120	92331	10000	22	30000	65
0.75	1	1.56	1.13	4	0.75	200	18120	64405	10000	31	30000	93
1	1.25	1.88	1.55	4	0.88	320	25140	64964	10000	49	30000	148
1.25	1.56	2.38	2.54	4	0.88	320	25140	39650	10000	81	30000	242
1.5	1.88	2.75	3.16	4	1	490	33060	41821	10000	117	30000	351
2	2.31	3.38	4.78	8	0.88	320	25140	42081	10000	76	30000	228
2.5	2.75	3.88	5.88	8	1	490	33060	44971	10000	109	30000	327
3	3.63	4.75	7.37	8	1.13	710	43680	47429	10000	150	30000	449
4	4.63	5.88	10.31	8	1.25	1000	55740	43239	10000	231	30000	694
5	5.63	7	13.58	8	1.5	1600	84300	49651	10000	322	30000	967
6	6.75	8.25	17.66	12	1.38	1360	69300	47083	10000	289	30000	867
8	8.5	10.13	23.84	12	1.63	2200	100800	50742	10000	434	30000	1301
10	10.5	12.25	31.25	12	1.88	4000	138240	53079	10000	754	30000	2261
12	12.75	14.5	37.43	16	2	4400	159120	68010	10000	647	30000	1941
14	14.25	15.75	35.55	16	2.25	6360	205380	93024	10000	684	30000	2051
16	16	18	53.38	16	2.5	8800	257520	77188	10000	1140	30000	3420
18	18.25	20.5	68.44	16	2.75	11840	315540	73765	10000	1605	30000	4815
20	20.25	22.5	75.51	16	3	15440	379440	80403	10000	1920	30000	5761
24	24.25	26.75	100.09	16	3.5	26000	525000	83927	10000	3098	30000	9294

Tables are based on the use of bolts with a yield strength of 100,000 psi.

Torque Tables

For Spiral Wound Gaskets, ASME B16.5

Class 2500

Nom. Pipe Size (inches)	Gsk. ID Contact (inches)	Gsk. OD Contact (inches)	Gsk. Area Contact (Sq. in.)	No. of Bolts	Size of Bolts (inches)	Max. Torque per Bolts @ 60 ksi Bolt Stress (ft lb)	Comp. per Bolt @ 60K (ft lb)	Max. Gsk. Comp. Available (psi)	Min. Gsk. Comp. Recomm. (psi)	Minimum Torque per Bolt (ft lb)	Max. Gsk. Comp. Avail. (psi)	Prefer'd Torque (ft lb)
0.5	0.75	1.25	0.79	4	0.75	200	18120	92331	10000	22	30000	65
0.75	1	1.56	1.13	4	0.75	200	18120	64405	10000	31	30000	93
1	1.25	1.88	1.55	4	0.88	320	25140	64964	10000	49	30000	148
1.25	1.56	2.38	2.54	4	1	490	33060	52141	10000	94	30000	282
1.5	1.88	2.75	3.16	4	1.13	710	43680	55255	10000	128	30000	385
2	2.31	3.38	4.78	8	1	490	33060	55338	10000	89	30000	266
2.5	2.75	3.88	5.88	8	1.13	710	43680	59417	10000	119	30000	358
3	3.63	4.75	7.37	8	1.25	1000	55740	60524	10000	165	30000	496
4	4.63	5.88	10.31	8	1.5	1600	84300	65394	10000	245	30000	734
5	5.63	7	13.58	8	1.75	3000	118800	69970	10000	429	30000	1286
6	6.75	8.25	17.66	8	2	4400	159120	72071	10000	611	30000	1832
8	8.5	10.13	23.84	12	2	4400	159120	80101	10000	549	30000	1648
10	10.63	12.25	29.10	12	2.5	8800	257520	106207	10000	829	30000	2486
12	12.5	14.5	42.39	12	2.75	11840	315540	89325	10000	1325	30000	3976

Tables are based on the use of bolts with a yield strength of 100,000 psi.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Torque to Stress Bolts

The torque required to produce a certain stress in bolting is dependent on several conditions, including:

- Diameter and number of threads on bolt
- Condition of nut bearing surfaces
- Lubrication of bolt threads and nut bearing surfaces.

The tables below reflect the results of many tests to determine the relation between torque and bolt stress.

Values are based on steel bolts that have been well-lubricated with a heavy graphite and oil mixture.

A non-lubricated bolt has an efficiency of about 50% of a well-lubricated bolt. Also, different lubricants produce results that vary from 50% to 100% of the tabulated stress figures.

For Alloy Steel Stud Bolts (Load in pounds on stud bolts when torque load is applied)

Nominal Diameter of Bolt (inches)	Number of Threads (per inch)	Diameter at Root of Thread (inches)	Area at Root of Thread (sq. inch)	Stress					
				30,000 psi		45,000 psi		60,000 psi	
				Torque (ft lbs)	Compression (lbs)	Torque (ft lbs)	Compression (lbs)	Torque (ft lbs)	Compression (lbs)
1/4	20	0.185	0.027	4	810	6	1215	8	1620
5/16	18	0.240	0.045	8	1350	12	2025	16	2700
3/8	16	0.294	0.068	12	2040	18	3060	24	4080
7/16	14	0.345	0.093	20	2790	30	4185	40	5580
1/2	13	0.400	0.126	30	3780	45	5670	60	7560
9/16	12	0.454	0.162	45	4860	68	7290	90	9720
5/8	11	0.507	0.202	60	6060	90	9090	120	12120
3/4	10	0.620	0.302	100	9060	150	13590	200	18120
7/8	9	0.731	0.419	160	12570	240	18855	320	25140
1	8	0.838	0.551	245	16530	368	24795	490	33060
1-1/8	8	0.963	0.728	355	21840	533	32760	710	43680
1-1/4	8	1.088	0.929	500	27870	750	41805	1000	55740
1-3/8	8	1.213	1.155	680	34650	1020	51975	1360	69300
1-1/2	8	1.338	1.405	800	42150	1200	63225	1600	84300
1-5/8	8	1.463	1.680	1100	50400	1650	75600	2200	100800
1-3/4	8	1.588	1.980	1500	59400	2250	89100	3000	118800
1-7/8	8	1.713	2.304	2000	69120	3000	103680	4000	138240
2	8	1.838	2.652	2200	79560	3300	119340	4400	159120
2-1/4	8	2.088	3.423	3180	102690	4770	154035	6360	205380
2-1/2	8	2.338	4.292	4400	128760	6600	193140	8800	257520
2-3/4	8	2.588	5.259	5920	157770	8880	236655	11840	315540
3	8	2.838	6.324	7720	189720	11580	264580	15440	379440

For Machine Bolts and Cold Rolled Steel Stud Bolts (Load in pounds on stud bolts when torque load is applied)

Nominal Diameter of Bolt (inches)	Number of Threads (per inch)	Diameter at Root of Thread (inches)	Area at Root of Thread (sq. inch)	Stress					
				7,500 psi		15,000 psi		30,000 psi	
				Torque (ft lbs)	Compression (lbs)	Torque (ft lbs)	Compression (lbs)	Torque (ft lbs)	Compression (lbs)
1/4	20	0.185	0.027	1	203	2	405	4	810
5/16	18	0.240	0.045	2	338	4	675	8	1350
3/8	16	0.294	0.068	3	510	6	1020	12	2040
7/16	14	0.345	0.093	5	698	10	1395	20	2790
1/2	13	0.400	0.126	8	945	15	1890	30	3780
9/16	12	0.454	0.162	12	1215	23	2340	45	4860
5/8	11	0.507	0.202	15	1515	30	3030	60	6060
3/4	10	0.620	0.302	25	2265	50	4530	100	9060
7/8	9	0.731	0.419	40	3143	80	6285	160	12570
1	8	0.838	0.551	62	4133	123	8265	245	16530
1-1/8	7	0.939	0.693	98	5190	195	10380	390	20760
1-1/4	7	1.064	0.890	137	6675	273	13350	545	26700
1-3/8	6	1.158	1.054	183	7905	365	15810	730	31620
1-1/2	6	1.283	1.294	219	9705	437	19410	875	38820
1-5/8	5-1/2	1.389	1.515	300	11363	600	22725	1200	45450
1-3/4	5	1.490	1.744	390	13080	775	26160	1550	52320
1-7/8	5	1.615	2.049	525	15368	1050	30735	2100	61470
2	4-1/2	1.711	2.300	563	17250	1125	34500	2250	69000

Flange and Bolt Dimensions

For Standard Flanges

NPS (inches)	150 psi				300 psi				400 psi				600 psi			
	Dia. of Flange (inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)	Dia. of Flange (Inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)	Dia. of Flange (Inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)	Dia. of Flange (Inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)
1/4	3-3/8	4	1/2	2-1/4	3-3/8	4	1/2	2-1/4	3-3/8	4	1/2	2-1/4	3-3/8	4	1/2	2-1/4
1/2	3-1/2	4	1/2	2-3/8	3-3/4	4	1/2	2-5/8	3-3/4	4	1/2	2-5/8	3-3/4	4	1/2	2-5/8
3/4	3-7/8	4	1/2	2-3/4	4-5/8	4	5/8	3-1/4	4-5/8	4	5/8	3-1/4	4-5/8	4	5/8	3-1/4
1	4-1/4	4	1/2	3-1/8	4-7/8	4	5/8	3-1/2	4-7/8	4	5/8	3-1/2	4-7/8	4	5/8	3-1/2
1-1/4	4-5/8	4	1/2	3-1/2	5-1/4	4	5/8	3-7/8	5-1/4	4	5/8	3-7/8	5-1/4	4	5/8	3-7/8
1-1/2	5	4	1/2	3-7/8	6-1/8	4	3/4	4-1/2	6-1/8	4	3/4	4-1/2	6-1/8	4	3/4	4-1/2
2	6	4	5/8	4-3/4	6-1/2	8	5/8	5	6-1/2	8	5/8	5	6-1/2	8	5/8	5
2-1/2	7	4	5/8	5-1/2	7-1/2	8	3/4	5-7/8	7-1/2	8	3/4	5-7/8	7-1/2	8	3/4	5-7/8
3	7-1/2	4	5/8	6	8-1/4	8	3/4	6-5/8	8-1/4	8	3/4	6-5/8	8-1/4	8	3/4	6-5/8
3-1/2	8-1/2	8	5/8	7	9	8	3/4	7-1/4	9	8	7/8	7-1/4	9	8	7/8	7-1/4
4	9	8	5/8	7-1/2	10	8	3/4	7-7/8	10	8	7/8	7-7/8	10-3/4	8	7/8	8-1/2
5	10	8	3/4	8-1/2	11	8	3/4	9-1/4	11	8	7/8	9-1/4	13	8	1	10-1/2
6	11	8	3/4	9-1/2	12-1/2	12	3/4	10-5/8	12-1/2	12	7/8	10-5/8	14	12	1	11-1/2
8	13-1/2	8	3/4	11-3/4	15	12	7/8	13	15	12	1	13	16-1/2	12	1-1/8	13-3/4
10	16	12	7/8	14-1/4	17-1/2	16	1	15-1/4	17-1/2	16	1-1/8	15-1/4	20	16	1-1/4	17
12	19	12	7/8	17	20-1/2	16	1-1/8	17-3/4	20-1/2	16	1-1/4	17-3/4	22	20	1-1/4	19-1/4
14	21	12	1	18-3/4	23	20	1-1/8	20-1/4	23	20	1-1/4	20-1/4	23-3/4	20	1-3/8	20-3/4
16	23-1/2	16	1	21-1/4	25-1/2	20	1-1/4	22-1/2	25-1/2	20	1-3/8	22-1/2	27	20	1-1/2	23-3/4
18	25	16	1-1/8	22-3/4	28	24	1-1/4	24-3/4	28	24	1-3/8	24-3/4	29-1/4	20	1-5/8	25-3/4
20	27-1/2	20	1-1/8	25	30-1/2	24	1-1/4	27	30-1/2	24	1-1/2	27	32	24	1-5/8	28-1/2
24	32	20	1-1/4	29-1/2	36	24	1-1/2	32	36	24	1-3/4	32	37	24	1-7/8	33

NPS (inches)	900 psi				1500 psi				2500 psi			
	Dia. of Flange (inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)	Dia. of Flange (Inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)	Dia. of Flange (Inches)	No. of Bolts	Dia. of Bolts (Inches)	Bolt Circle (Inches)
1/2	4-3/4	4	3/4	3-1/4	4-3/4	4	3/4	3-1/4	5-1/4	4	3/4	3-1/2
3/4	5-1/8	4	3/4	3-1/2	5-1/8	4	3/4	3-1/2	5-1/2	4	3/4	3-3/4
1	5-7/8	4	7/8	4	5-7/8	4	7/8	4	6-1/4	4	7/8	4-1/4
1-1/4	6-1/4	4	7/8	4-3/8	6-1/4	4	7/8	4-3/8	7-1/4	4	1	5-1/8
1-1/2	7	4	1	4-7/8	7	4	1	4-7/8	8	4	1-1/8	5-3/4
2	8-1/2	8	7/8	6-1/2	8-1/2	8	7/8	6-1/2	9-1/4	8	1	6-3/4
2-1/2	9-5/8	8	1	7-1/2	9-5/8	8	1	7-1/2	10-1/2	8	1-1/8	7-3/4
3	9-1/2	8	7/8	7-1/2	10-1/2	8	1-1/8	8	12	8	1-1/4	9
4	11-1/2	8	1-1/8	9-1/4	12-1/4	8	1-1/4	9-1/2	14	8	1-1/2	10-3/4
5	13-3/4	8	1-1/4	11	14-3/4	8	1-1/2	11-1/2	16-1/2	8	1-3/4	12-3/4
6	15	12	1-1/8	12-1/2	15-1/2	12	1-3/8	12-1/2	19	8	2	14-1/2
8	18-1/2	12	1-3/8	15-1/2	19	12	1-5/8	15-1/2	21-3/4	12	2	17-1/4
10	21-1/2	16	1-3/8	18-1/2	23	12	1-7/8	19	26-1/2	12	2-1/2	21-1/4
12	24	20	1-3/8	21	26-1/2	16	2	22-1/2	30	12	2-3/4	24-3/8
14	25-1/4	20	1-1/2	22	29-1/2	16	2-1/4	25				
16	27-3/4	20	1-5/8	24-1/2	32-1/2	16	2-1/2	27-3/4				
18	31	20	1-7/8	27	36	16	2-3/4	30-1/2				
20	33-3/4	20	2	29-1/2	38-3/4	16	3	32-3/4				
24	41	20	2-1/2	35-1/2	46	16	3-1/2	39				

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.


Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Gasket Installation

In a flanged connection, all components must be correct to achieve a seal. The most common cause of leaky gasketed joints is improper installation procedures.

Bolting Procedures

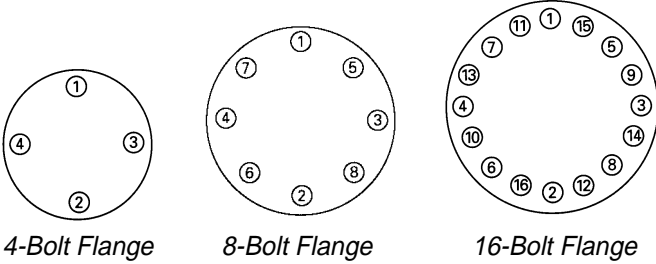

- Place the gasket on the flange surface to be sealed.
- Bring the opposing flange into contact with the gasket.
- Clean the bolts and lubricate them with a quality lubricant, such as an oil and graphite mixture.
- Place the bolts into the bolt holes.
- Finger-tighten the nuts.
- Follow the bolting sequence in the diagrams above.
- During the initial tightening sequence, do not tighten any bolts more than 30% of the recommended bolt stress. Doing so will cause cocking of the flange and the gasket will be crushed.
- Upon reaching the recommended torque requirements, do a clockwise bolt-to-bolt torque check to make certain that the bolts have been stressed evenly.
- Due to creep and stress relaxation, it is essential to prestress the bolts to ensure adequate stress load during operation.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Hydrostatic Testing Precautions

- If hydrostatic tests are to be performed at pressures higher than those for which the flange was rated, higher bolt pressures must be applied in order to get a satisfactory seal under the test conditions.
- Use high-strength alloy bolts (ASTM B 193 Grade B7 is suggested) during the tests. They may be removed upon completion. Higher stress values required to seat the gasket during hydrostatic tests at higher than flange rated pressures may cause the standard bolts to be stressed beyond their yield points.
- Upon completion of hydrostatic testing, relieve all bolt stress by 50% of the allowable stress.
- Begin replacing the high-strength alloy bolts (suggested for test conditions) one by one with the standard bolts while maintaining stress on the gasket.
- After replacing all the bolts, follow the tightening procedure recommended in the bolting sequence diagrams.

Prestressing Bolts for Thermal Expansion

Bolts should be prestressed to compensate for thermal expansion as well as for relaxation, creep, hydrostatic end pressure and residual gasket loads.

A difference in the coefficient of thermal expansion between the materials of the flange and the bolts may change loads. In cases of serious thermal expansion, it may be necessary to apply a minimum of stress to the bolts and allow the pipe expansion to complete the compression of the gasket.

A gasket with a centering guide ring should be compressed to the guide ring. A gasket without a centering guide ring must be installed with precautions taken to prevent thermal expansion from crushing the gasket beyond its elastic limit.

Troubleshooting Leaking Joints

One of the best methods for determining the cause of joint leakage is the careful examination of the gasket where the leakage occurred.

Observation	Possible Remedies
Gasket badly corroded	<ul style="list-style-type: none"> • Select replacement material with improved corrosion resistance.
Gasket extruded excessively	<ul style="list-style-type: none"> • Select replacement material with better cold flow properties. • Select replacement material with better load capacity—i.e., more dense.
Gasket grossly crushed	<ul style="list-style-type: none"> • Select replacement material with better load carrying capacity. • Provide means to prevent crushing the gasket by use of a stop ring or redesign of flanges.
Gasket mechanically damaged due to overhang of raised face or flange bore.	<ul style="list-style-type: none"> • Review gasket dimensions to insure gaskets are proper size. • Make certain gaskets are properly centered in joint.
No apparent gasket compression achieved	<ul style="list-style-type: none"> • Select softer gasket material. • Select thicker gasket material. • Reduce gasket area to allow higher unit seating load.
Gasket substantially thinner on OD than ID due to excessive flange rotation or bending	<ul style="list-style-type: none"> • Alter gasket dimensions to move gasket reaction closer to bolts to minimize bending movement. • Provide stiffness to flange by means of back-up rings. • Select softer gasket material to lower required seating stresses. • Reduce gasket area to lower seating stresses.
Gasket unevenly compressed around circumference	<ul style="list-style-type: none"> • Make certain proper sequential bolt-up procedures are followed.
Gasket thickness varies periodically around circumference	<ul style="list-style-type: none"> • Provide reinforcing rings for flanges to better distribute bolt load. • Select gasket material with lower seating stress. • Provide additional bolts if possible to obtain better load distribution. • If flanges are warped, remachine or use softer gasket material.

Metal-Clad and Heat Exchanger Gaskets

Garlock manufactures a wide variety of heat exchanger and metal-clad gaskets. Among the most requested styles are double-jacketed gaskets, Kammprofile, corrugated gaskets, and solid gaskets, all available in a choice of metals and filler materials.

Custom configurations of heat exchanger gaskets are also available. Spiral windings can be designed with or without partitions welded to the winding, or inner and outer rings with welded partitions.

Contact Garlock for all of your heat exchanger gasket needs.



Tolerances

Gasket Outside Diameter	Inside Diameter Tolerance	Outside Diameter Tolerance
Up to 6"	+1/32" / -0	+0 / -1/32"
6" to 60"	+1/16" / -0	+0 / -1/16"
60" and above	+3/32" / -0	+0 / -3/32"

Thickness: $\pm 1/64"$
 Rib Width: $\pm 1/64"$

Radii: $\pm 1/16"$
 Rib Location: $\pm 1/16"$

Gasket Widths

Gasket Diameter	Minimum Width (Gasket and Ribs)	Maximum Width
Up to 12"	3/16"	*
Over 12"	1/4"	*

* Note: There is no maximum width for heat exchanger gaskets.


WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.


Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.


Heat Exchanger Gasket Configurations




R




C-A




C-B




D-A




D-B



E-A



E-B




E-C




E-D




F-A




F-B



F-C




G-A




G-B




G-C




G-D



G-E




G-F




G-G




G-H




G-I




H-A




H-B




H-C



H-D




H-E



H-F




H-G




H-H



H-I




H-J




H-K




H-L




I-A



I-B



I-C




I-D




I-E




I-F




I-G



I-H



I-I



I-J




I-K




J-A




J-B



J-C



J-D



J-E



J-F



J-G



J-H




K-A



K-B




K-C




K-D

GRAPHONIC[®] Metallic Gasket

The superior technology of the GRAPHONIC[®] family of gaskets ensures excellent sealing performance and reliability, even in the most difficult applications. Each of the three styles combines a corrugated metal core with a compressible sealing element of various materials, for resistance to a wide range of harsh conditions, including extreme temperature, corrosive chemicals, and thermal cycling.

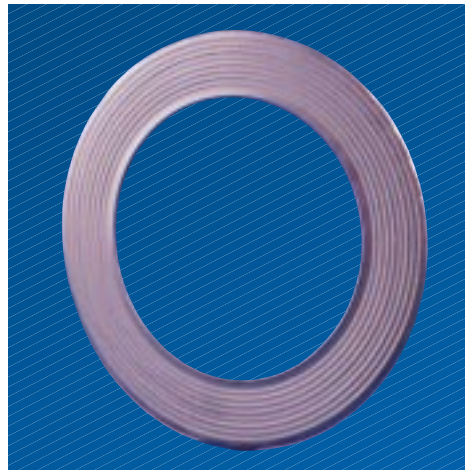

Construction

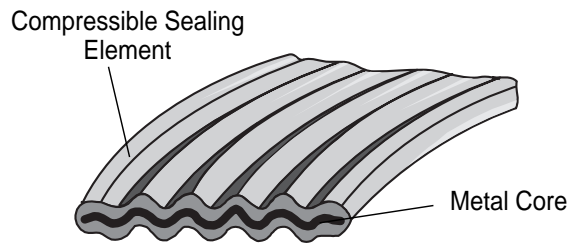

GRAPHONIC[®] Gasket

With flexible graphite sealing element

- Accommodates a wide range of temperatures
- Seals effectively during thermal cycling
- Fire safe—withstood API and FITT fire tests
- Chemically resistant
- Long service life

TEPHONIC[®] Gasket

With ePTFE sealing element

- Chemically inert
- Forms a tight seal under low bolt load
- Conforms to minor sealing surface imperfections
- Withstands temperatures to 500°F (260°C)

G.E.T.[™] Gasket

With graphite and ePTFE sealing element

- Combines fire safety with chemical resistance
- Conforms to minor sealing surface imperfections
- Rigid yet compressible

INCONEL[®] is a registered trademark of Inco Alloys International, Inc.
 INCOLOY[®] is a registered trademark of Inco Alloys International, Inc.
 HASTELLOY[®] is a registered trademark of Haynes International.
 MONEL[®] is a registered trademark of International Nickel.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury. Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Standard Metals

- 304 Stainless
- 316L Stainless
- INCONEL[®] 600
- INCONEL[®] 625
- INCOLOY[®] 800
- INCOLOY[®] 825
- HASTELLOY[®] C276
- MONEL[®] 400

Sealing Elements

- Flexible graphite
- ePTFE
- Combination graphite and ePTFE

Engineering Data

	GRAPHONIC [®]	TEPHONIC [®] and G.E.T. [™]
Temperature		
Minimum:	-400°F (-240°C)	-350°F (-210°C)
Max. in atmosphere:	+850°F (454°C)*	+500°F (260°C)
Max. in steam:	+1200°F (650°C)	—
Max. continuous in reducing or inert media:	+5432°F (3000°C)	—
Pressure, max.:	2000 psig (140 bar)	
P x T, max.		
1/16" thickness:	700,000 (25,000) [†]	
1/8" thickness:	350,000 (12,000)	

* Maximum temperatures of 975°F (525°C) can be allowed for flexible graphite with oxidation inhibitors.

[†] P x T max. = psig x °F (bar x °C)


Note: When approaching maximum temperatures, consult the Garlock Metallic Gasket Engineering Dept. at 1-800-972-7638 or 1-281-459-7200.

Garlock Kammprofile Gasket

Superior Performance

Serrated solid metal core

- Serrations concentrate bolt load on small area for tight seal at lower stress
- Solid metal core resists cold flow, overcompression and blowout
- Rigid core provides exceptional stability, even in large sizes, and facilitates handling and installation

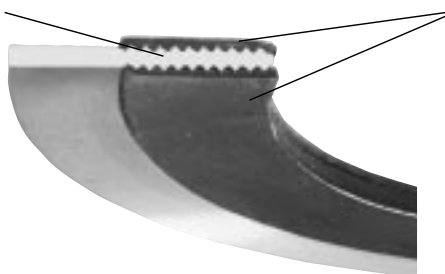

Soft, deformable sealing material

- Under compression, fills seating surface imperfections to form a tight, metal-to-metal connection
- Seals under low stress—ideal for weaker flanges
- Withstands extreme fluctuations in temperatures and pressures

Style Selection Guide

Garlock Kammprofile Styles	Construction		Centering Ring		Flange			
	Parallel Root	Convex Root	Integral	Floating	Male/Female	Tongue/Groove	Flat Face	Raised Face
642 A	●				●	●		
642 AR	●		●				●	●
642 AR2	●			●			●	●
642 AC		●			●	●		
642 ARC		●	●				●	●
642 ARC2		●		●			●	●

- **Convex root** core compensates for flange weakness and counteracts flange rotation
- **Integral centering ring** ensures optimum gasket positioning
- **Floating centering ring** attached outside sealing area compensates for expansion and contraction during thermal cycling

Applications

- Accommodates standard ASME flanges as well as weaker and non-circular flanges
- Economical replacement for jacketed heat exchanger gaskets
- Seals less-than-perfect flanges
- Handles pressures from vacuum to Class 2500
- Withstands temperatures from cryogenics to 2000°F (1090°C)

Material Options

Metal Core	Max. Temperature	
	°F	°C
304 SS	1400°F	760°C
316 SS	1400°F	760°C
321 SS	1400°F	760°C
Aluminum	800°F	425°C
Copper	600°F	315°C
HASTELLOY®	2000°F	1090°C
INCONEL®	2000°F	1090°C
INCOLOY®	1600°F	870°C
MONEL®	1500°F	815°C
Titanium	2000°F	1090°C

Sealing Element	Max. Temperature	
	°F	°C
ePTFE	500°F	260°C
Flex. graphite*	950°F	510°C
GYLON®	500°F	260°C
PTFE	500°F	260°C

* Up to 6000°F (3300°C) in reducing atmosphere
 GYLON® is a registered trademark of Garlock Inc.
 HASTELLOY® is a registered trademark of Haynes International. INCOLOY® and INCONEL® are registered trademarks of Inco Alloys International, Inc. MONEL® is a registered trademark of International Nickel.

Series 600 Metal-Clad Gaskets

Gasket Styles

Style 600—Corrugated Solid Metal

A plain, all-metal corrugated gasket for use in low pressure applications that require a thin line contact because of space or weight limitations. Corrugated gaskets are a versatile sealing element where the available bolt loads are low. Depending on the materials and construction, these gaskets can be very resilient.




Style 624—Single-Jacketed Overlap

Construction of this gasket offers more filler protection than the standard single-jacketed design (Style 620). It is especially useful for applications where the radial dimensions do not allow space for a double-jacketed gasket.



Style 606—Solid Metal with Flexible Graphite Covering

This gasket is identical to the plain solid metal gasket (Style 640), covered with a layer of flexible graphite. This covering layer will fill flange face imperfections sometimes found in flanges that have not been properly maintained.

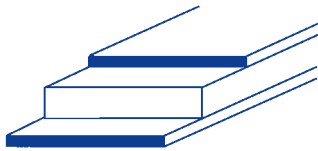

Style 626—Double-Jacketed Corrugated

Garlock Style 626 employs a corrugated jacket to increase resilience. Suited for circular and non-circular applications in widths of 3/8" and wider, it is an improvement over the standard double-jacketed Style 623 gasket. If slight leakage should occur across the primary seal at the inner edge of the gasket, the concentric corrugations act as labyrinth seals.



Style 620—Single-Jacketed

Generally used where the radial dimensions of the equipment sealing surfaces only allow space for a narrow width seal. Single-jacketed gaskets are constructed by encasing the soft filler material on one face and both edges.



Style 627—Double Shell

The double shell on this gasket allows greater hoop strength and rigidity with the addition of a completely overlapping inner seal. This gasket will withstand higher compressive loads common in high pressure applications.



Style 623—Double-Jacketed

The double-jacketed gasket has good compressibility and resilience and is the most popular clad gasket manufactured.



Series 600 Gasket Styles

Style 629—Double-Jacketed Corrugated with Corrugated Metal Filler

The metal filler in Style 629 has greater resilience to problems resulting from temperature changes. This unique multi-ply construction provides a more resilient gasket that adapts well to temperature and pressure cycling. The temperature limits of this gasket are governed only by the metal selected.



Style 631—Two-Piece French-Type

Garlock Style 631 is ideal for narrow circular applications that require a positive unbroken metal gasket line across the full width of the flange. The filler is exposed on the OD. This gasket is also available in one- and three-piece designs.



Style 635—Selected Metal and CERAFELT®*

This gasket is a modification of the Garlock Style 631 gasket and is designed for use in lightweight flanges. A thick compressible layer of CERAFELT® is shielded on the ID with two French-type shields welded together. This gasket is commonly used to handle very hot gases in duct work.



CERAFELT® is a registered trademark of Thermal Ceramics.

Style 640—Solid Metal

This plain solid metal gasket can be supplied in any desired configuration. Where bolting force is sufficient, this style gasket is capable of extremely tight make-ups, giving high mechanical strength, good heat conductivity, resistance to temperature, corrosion and pressure.



Style 641—Solid Metal Profile

Profile gaskets combine the desirable qualities of a solid metal gasket with the advantages of a reduced area of contact, thereby reducing the bolt load required to effect a seal. This gasket has the same advantages of strength, heat conductivity, and resistance to temperature, pressure and corrosion as Garlock Style 640.



Style 642—Grooved Metal

See Kammprofile, page 41.

Styles 644 and 645—Single- and Double-Jacketed Profile

Metal-jacketed profile gaskets employ the same principle of reduced contact area while protecting the flange faces from damage due to scoring. This gasket can be manufactured in one of two designs—either single-jacketed (Style 644) or double-jacketed (Style 645).



WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Ordering Guide

RW, RWI Spiral Wound

When ordering, specify:

- Nominal pipe size and pressure class
- Winding and filler materials
- Centering and/or inner compression ring material

SW Spiral Wound

When ordering, specify:

- OD and ID dimensions (and tolerance, if other than standard—see page 13)
- Thickness of gasket
- Winding and filler material
- Inner ring material, if required (Style SWI)
- Pressure rating

HH, MC and MCR Manhole

When ordering, specify:

- Make and model of boiler and/or equipment if available (See chart page 10)
- Gasket style and configuration
- Dimensions of gasket (thickness, flange seating width, and shape)
- Maximum operating pressure and temperature
- Type of metal and filler materials

Custom Gaskets

A spiral wound gasket can be made to almost any dimension required. Possible designs include multiple windings and rings, with combinations of different fillers or special winding materials and ring shapes. Describe your application or send us a drawing and we'll help you design the appropriate winding.

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

Heat Exchanger

The size restrictions for heat exchanger gaskets depend only on the available sizes of the materials. Heat exchanger gaskets are commonly made in diameters up to 120", with rib widths up to 1-1/4" and thicknesses up to 1/4".

When ordering, specify:


- Style number
- Shape (Give configuration code, page 39)
- Thickness
- Material (metal or metal and filler)

Plus specify (according to diagram below):

1. Outside diameter
2. Inside diameter
3. Rib width
4. Radius of rib
5. Bolt circle radius
6. Distance from center line of gasket to center line of ribs
7. Radius around bolt
8. Size and number of bolt holes

Note:

In addition to the above information, drawings of your application are always helpful in proper dimensioning of gaskets.

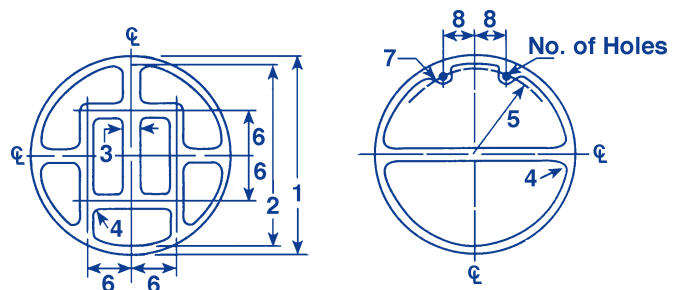

Application Data Form

Date _____

From _____

For: Garlock Metallic Gasketing Engineering

Title _____

Fax 1-281-458-0502

Company _____

Page: 1 of _____

Address _____

Drawing attached Yes No

Fax No. _____

Phone No. _____

E-mail Address _____

Application

- | | |
|---|--|
| <input type="checkbox"/> Pipe Flange | <input type="checkbox"/> Pumps – centrifugal / horizontal split case |
| <input type="checkbox"/> Heat Exchanger | <input type="checkbox"/> Flue Duct |
| <input type="checkbox"/> Manway | <input type="checkbox"/> Valve Bonnet |
| <input type="checkbox"/> Compressor | <input type="checkbox"/> Other _____ |

Service Conditions

Maximum Temperature _____ °F/°C Continuous Operating Temperature _____ °F/°C
Internal Pressure _____ psig/bar PSIG/bar Continuous Intermittent
Thermal Cycling _____ / 24 hours Vibration Yes No
Other (specify) _____

Bolts

Grade _____ Diameter _____
Length _____ Number _____

Chemical Compatibility

Media _____ pH _____
Concentration _____ Liquid or Gas _____

Flange

Standard

Material _____
Size _____ Rating _____
Surface Finish _____ RMS
 Phonographic Concentric
Face (raised, flat, tongue & groove, etc.) _____

Non-Standard

Material _____
I.D./O.D. _____
Flange Thickness _____
Bolt Circle Diameter _____
Surface Finish _____ RMS
 Phonographic Concentric
Face (raised, flat, tongue & groove, etc.) _____

Comments: _____

More than just great products...

Beyond offering you the widest available range of products for packing and sealing, Garlock enhances the value of its products with technical services and comprehensive training programs:

- ISO 9002-94 registration for Industrial Gasketing, KLOZURE® Oil Seals, Bearing Protectors, Expansion Joints, Hydraulic Components, Mechanical Seals, and Industrial Rubber Products.
- A global network of stocking Authorized Garlock Distributors.
- Factory sales representatives and applications engineers available for problem solving when and where it is needed.
- Toll-free 800 telephone and fax numbers for immediate product information.
- In-plant surveys of equipment and processes, providing the customer with recommendations to identify and eliminate sealing and packing problems before they start.
- The most sophisticated and most comprehensive test facilities available.
- Technical field seminars on all Garlock products.
- Factory-sponsored product training programs, including hands-on seminars, to ensure that Garlock representatives and their distributor personnel are the best in the industry.
- Technical Bulletins to keep you up-to-date on product enhancements and changes.

Customers who specify Garlock fluid sealing products get, at no extra cost, the high quality support needed to run a profitable operation.

AUTHORIZED DISTRIBUTOR



WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

GARLOCK is a registered trademark for packings, seals, gaskets, and other products of Garlock.

© Garlock Inc 2000. All rights reserved worldwide.

BF Goodrich

Garlock Sealing Technologies
Metallic Gaskets
1977 Kindred Street
Houston, TX 77049 USA
Phone: 1-281-459-7200
1-800-972-7638
Fax: 1-281-458-0502
1-800-363-5674

Visit the Garlock network:
www.garlock.net

Other Garlock facilities are located in:

Palmyra, NY, USA	1-315-597-4811	Fax: 1-315-597-3216
Paragould, AR, USA	1-870-239-4051	Fax: 1-870-239-4054
Columbia, SC, USA	1-803-783-1880	Fax: 1-803-783-4279
Sydney, Australia	61-2-9793-2511	Fax: 61-2-9793-2544
São Paulo, Brazil	55-11-884-9680	Fax: 55-11-884-9680
Oakville, Canada	1-905-829-3200	Fax: 1-905-829-3333
Berkshire, England	44-1635-38509	Fax: 44-1635-569573
Saint-Étienne, France	33-4-7743-5100	Fax: 33-4-7743-5151
Neuss, Germany	49-2131-3490	Fax: 49-2131-349-222
Seoul, Korea	822-554-6341	Fax: 822-554-6343
Mexico City, Mexico	52-5-567-7011	Fax: 52-5-368-0418
Singapore	65-254-7372	Fax: 65-254-6708